

TS 15X5/LL 2M/ST/ZN**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

General ordering data

Version	Terminal rail, with slot, Accessories, 15 x 5.5 x 2000 mm, Slit width: 4.20 mm, Slit length: 12.20 mm, Steel, galvanic zinc plated and passivated
Order No.	0117500000
Type	TS 15X5/LL 2M/ST/ZN
GTIN (EAN)	4008190150662
Qty.	2 m

TS 15X5/LL 2M/ST/ZN

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	5.5 mm	Depth (inches)	0.217 inch
Height	15 mm	Height (inches)	0.591 inch
Width	2,000 mm	Width (inches)	78.74 inch
Net weight	140 g		

Mounting rail

Drill-hole diameter	4.2 mm
Length of the terminal rail	nominal 2,000 mm
	max. 2,000 mm
	min. 0 mm
Material	Steel
Pre-punched mounting rail	Yes
Short circuit strength corresponds to E-Cu wire	10 mm ²
Short-time withstand current per second according to IEC 60947-7-2	1.2 kA
Slit gap	8 mm
Slit gap	
Slit length	12.2 mm
Slit length	
Slit width	4.2 mm
Slit width	
Slotted drill holes	Yes
Solder eyelet hole diameter (D)	4.2 mm
Spacing of holes, centre-to-centre	20 mm
Standards	DIN EN 60715
Surface finish	galvanic zinc plated and passivated
Thickness	1 mm

Classifications

ETIM 6.0	EC001285	ETIM 7.0	EC001285
ETIM 8.0	EC001285	ETIM 9.0	EC001285
ECLASS 9.0	27-40-06-02	ECLASS 9.1	27-40-06-02
ECLASS 10.0	27-40-06-02	ECLASS 11.0	27-40-06-02
ECLASS 12.0	27-40-06-02	ECLASS 13.0	27-40-06-02

Environmental Product Compliance

REACH SVHC /

Approvals

ROHS Conform

Downloads

Engineering Data	CAD data – STEP
Engineering Data	Zuken E3.S
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	

Creation date July 2, 2024 10:30:30 PM CEST

Catalogue status 29.06.2024 / We reserve the right to make technical changes.

TS 15X5/LL 2M/ST/ZN

Weidmüller Interface GmbH & Co. KG



Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

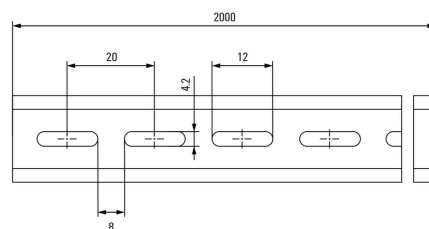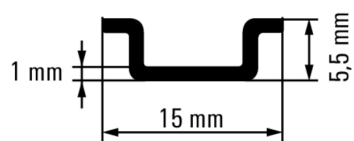

TS 15X5/LL 2M/ST/ZN

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Screws




Depending on the terminal block or also accessories, we offer different types of screws as additional items or also spare parts.

General ordering data

Type	BFSC M4X6	Version
Order No.	0149700000	Mounting screw (Terminal)
GTIN (EAN)	4008190016098	
Qty.	100 pc(s).	
Type	BFSC M4X6 MS	Version
Order No.	0136300000	Mounting screw (Terminal)
GTIN (EAN)	4008190177713	
Qty.	50 pc(s).	

TS 15



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

Type	EW 15/2	Version
Order No.	1071900000	End bracket, Plastic, dark beige, Rail: TS 15, Direct mounting
GTIN (EAN)	4008190462949	
Qty.	50 pc(s).	
Type	ZEW 15	Version
Order No.	7920340000	End bracket, Plastic, beige, Rail: TS 15, Direct mounting
GTIN (EAN)	4032248238910	
Qty.	20 pc(s).	
Type	EW 15	Version
Order No.	0382860000	End bracket, Polyamide 66, beige, Rail: TS 15, Direct mounting
GTIN (EAN)	4008190187804	
Qty.	50 pc(s).	

TS 15X5/LL 2M/ST/ZN**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Mounting support**

We offer a broad portfolio of mounting support for easy handling and supplementation of our products. From various tools to insulating sleeves and various screws, our components are matched to each other down to the last detail and thus facilitate assembly in compliance with the respective standards and protective regulations.

General ordering data

Type	SO SH1	Version
Order No.	0401460000	Busbar support
GTIN (EAN)	4008190188092	
Qty.	20 pc(s).	