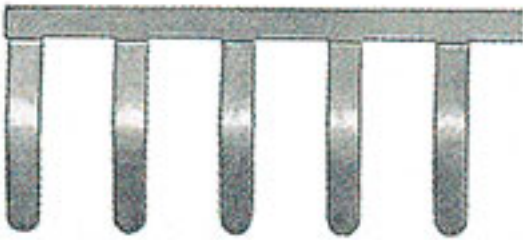


QB 58/8/15**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Screwable cross-connections are easy to mount and de mount. Thanks to the big contact surface, even high currents can be transmitted with maximum contact reliability.

General ordering data

| | |
|------------|--|
| Version | Cross-connector (terminal), when screwed in, Number of poles: 58, Pitch in mm (P): 8.00, Insulated: No, 27 A, grey |
| Order No. | 0545400000 |
| Type | QB 58/8/15 |
| GTIN (EAN) | 4008190028794 |
| Qty. | 10 pc(s). |

QB 58/8/15

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|------------|----------|-----------------|-------------|
| Depth | 17.5 mm | Depth (inches) | 0.689 inch |
| Height | 458.5 mm | Height (inches) | 18.051 inch |
| Width | 0.8 mm | Width (inches) | 0.031 inch |
| Net weight | 21.96 g | | |

Temperatures

| | | | |
|---------------------|----------------|-----------------------|-----------------|
| Storage temperature | -25 °C...55 °C | Operating temperature | -60 °C...130 °C |
|---------------------|----------------|-----------------------|-----------------|

Material data

| | | | |
|----------|--------|--------|------|
| Material | Copper | Colour | grey |
|----------|--------|--------|------|

System specifications

| | |
|---------|---------------------------|
| Version | for cross-connection link |
|---------|---------------------------|

Additional technical data

| | | | |
|--------------------------|-----------------|---------------------|-----------------|
| Explosion-tested version | No | Installation advice | Direct mounting |
| Type of fixing | when screwed in | | |

Cross-connector

| | | | |
|-------------------------------------|-----------------|---------------------------|--------|
| Number of cross-connected terminals | 58 | Rated current, multi-pole | 17.5 A |
| Type | Cross-connector | | |

Dimensions

| | |
|-----------------|------|
| Pitch in mm (P) | 8 mm |
|-----------------|------|

General

| | | | |
|---------------------|-----------------|-----------------|----|
| Installation advice | Direct mounting | Number of poles | 58 |
|---------------------|-----------------|-----------------|----|

Rating data

| | |
|---------------|------|
| Rated current | 27 A |
|---------------|------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000489 | ETIM 7.0 | EC000489 |
| ETIM 8.0 | EC000489 | ETIM 9.0 | EC000489 |
| ECLASS 9.0 | 27-14-11-40 | ECLASS 9.1 | 27-14-11-40 |
| ECLASS 10.0 | 27-14-11-40 | ECLASS 11.0 | 27-14-11-40 |
| ECLASS 12.0 | 27-14-11-40 | ECLASS 13.0 | 27-25-03-03 |

Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | / |
|------------|---|

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Creation date July 7, 2024 7:57:57 PM CEST

Catalogue status 29.06.2024 / We reserve the right to make technical changes.

QB 58/8/15

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

| | |
|--------------------|---|
| Engineering Data | CAD data – STEP |
| User Documentation | StorageConditionsTerminalBlocks |
| Catalogues | Catalogues in PDF-format |

QB 58/8/15**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Insulation profiles****General ordering data**

| | | |
|------------|----------------------------|--------------------------------|
| Type | ISPF QB58 BL | Version |
| Order No. | 0546080000 | Insulation profile, PVC, blue |
| GTIN (EAN) | 4008190927035 | |
| Qty. | 10 pc(s). | |
| Type | ISPF QB58 RT | Version |
| Order No. | 0546040000 | Insulation profile, PVC, red |
| GTIN (EAN) | 4008190497941 | |
| Qty. | 10 pc(s). | |
| Type | ISPF QB58 SW | Version |
| Order No. | 0546000000 | Insulation profile, PVC, black |
| GTIN (EAN) | 4008190116705 | |
| Qty. | 10 pc(s). | |