

VSSC4 CL 24VAC/DC 0.5A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Overvoltage coupling along the conductor path may disturb or destroy sensitive signal inputs. It is important to provide protection in the immediate vicinity of I&C devices. Weidmüller's broad product range for the I&C sector offers products in a 2-piece, pluggable design and modular terminals for tension clamp or screw connection. These products are suitable for both binary and analogue signals. Weidmüller also offers other designs with integrated components such as gas discharge tubes or varistors. VARITECTOR stands for flexible and variable surge protection by Weidmüller, tested according to product standard IEC61643-21. The VARITECTOR series can be used in applications according to IEC 61643-22 / VDE 0845-3 for classes C1, C2, C3 and D1. The VARITECTOR SPC, SSC and MCZ OVP product families optimally combine electrical and mechanical properties. Size and easy handling play an important role. This surge protection is suited for confined spaces in industrial and process automation as well as in building automation applications.

General ordering data

| | |
|------------|---|
| Version | Surge protection for instrumentation and control, Surge protection for measurement and control, $U_p(L/N-PE) < 1000\text{ V}$ |
| Order No. | 1063730000 |
| Type | VSSC4 CL 24VAC/DC 0.5A |
| GTIN (EAN) | 4032248829088 |
| Qty. | 10 pc(s). |

VSSC4 CL 24VAC/DC 0.5A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

| | | | |
|------------|---------|-----------------|------------|
| Depth | 58.5 mm | Depth (inches) | 2.303 inch |
| Height | 76 mm | Height (inches) | 2.992 inch |
| Width | 6.2 mm | Width (inches) | 0.244 inch |
| Net weight | 26.6 g | | |

Temperatures

| | | | |
|---------------------|----------------|-----------------------|----------------|
| Storage temperature | -40 °C...80 °C | Operating temperature | -40 °C...70 °C |
| Humidity | 5...96 % | | |

Probability of failure

| | | | |
|------------------------------------|---------|------|---------|
| SIL in compliance with IEC 61508 | 2 | MTTF | 6,008 a |
| SFF | 89.74 % | λges | 19 |
| PFH in 1·10 ⁻⁹ per hour | 1.95 | | |

Rated data UL

| | | | |
|----------------------|---------|----------------|---------------|
| Certificate No. (UL) | E311081 | UL certificate | UL Zertifikat |
|----------------------|---------|----------------|---------------|

CSA protection data

| | | | |
|--|------|--|--------|
| Gas group C | IIB | Gas group D | IIA |
| Gas groups A, B | IIC | Input current, max. I _I | 500 mA |
| Input voltage, max. U _i | 42 V | Internal capacity, max. C _I | 1 nF |
| Internal inductance, max. L _I | 0 μH | | |

General data

| | | | |
|--------------------|---|---------------------------|----------|
| Colour | black | Design | Terminal |
| Isolating function | No | Optical function display | No |
| Protection degree | IP20 | Rail | TS 35 |
| Segment | Measurement - Monitoring - Setting | UL 94 flammability rating | V-0 |
| Version | Surge protection for mea- surement and control | | |

Insulation coordination acc. to EN 50178

| | | | |
|--------------------|---|------------------------|-----|
| Pollution severity | 2 | Surge voltage category | III |
|--------------------|---|------------------------|-----|

VSSC4 CL 24VAC/DC 0.5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Rated data IEC / EN

| | | | |
|---|-------------------------------|--|---|
| Discharge current I_{\max} (8/20 μ s) wire-PE | 5 kA | Discharge current I_{\max} (8/20 μ s) wire-wire | 5 kA |
| Discharge current I_n (8/20 μ s) wire-PE | 2.5 kA | Discharge current I_n (8/20 μ s) wire-wire | 2.5 kA |
| Discharge current, max. (8/20 μ s) | 10 kA | Fuse | 0.5 A |
| Insertion loss | 3.45 MHz | Lightning test current I_{imp} (10/350 μ s) | 0.5 kA |
| Lightning test current, I_{imp} (10/350 μ s) Wire-PE | 0.5 kA | Max. continuous voltage, U_c (AC) | 30 V |
| Max. continuous voltage, U_c (DC) | 42 V | Number of poles | 1 |
| Overload - failure mode | Modus 2 | Protection level U_p (typ.) | < 1000 V |
| Pulse-reset capacity | ≤ 150 ms | Rated current I_N | 500 mA |
| Rated voltage (AC) | 24 V | Rated voltage (DC) | 34 V |
| Requirements category acc. to IEC 61643-21 | C2, C3, D1 | Signal transmission properties (-3 dB) | 3.4 MHz |
| Standards | IEC 61643-21, HART-compatible | Surge current-carrying capacity C2 | 2.5 kA 8/20 μ s 5 kV 1.2/50 μ s |
| Surge current-carrying capacity C3 | 50 A 10/1000 μ s | Surge current-carrying capacity D1 | 0.5 kA 10/350 μ s |
| Voltage type | AC/DC | Volume resistance | 1.8 Ω 10 % |

Further details of approvals

| | |
|------------------|-----------------|
| GOST certificate | GOST-Zertifikat |
|------------------|-----------------|

Connection data

| | | | |
|--|-------------------|--|---------------------|
| Stripping length | 10 mm | Type of connection | Screw connection |
| Stripping length, rated connection | 8 mm | Tightening torque, min. | 0.5 Nm |
| Tightening torque, max. | 0.8 Nm | Clamping range, min. | 0.5 mm ² |
| Clamping range, max. | 4 mm ² | Wire cross-section, solid, min. | 0.5 mm ² |
| Wire cross-section, solid, max. | 6 mm ² | Conductor cross-section, flexible, AEH (DIN 46228-1), min. | 0.5 mm ² |
| Conductor cross-section, flexible, AEH (DIN 46228-1), max. | 4 mm ² | Connection cross-section, stranded, min. | 0.5 mm ² |
| Connection cross-section, stranded, max. | 4 mm ² | | |

Ratings IECEx/ATEX/cUL

| | |
|-----------------|-----------------|
| cUL certificate | cUL Certificate |
|-----------------|-----------------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000943 | ETIM 7.0 | EC000943 |
| ETIM 8.0 | EC000943 | ETIM 9.0 | EC000943 |
| ECLASS 9.0 | 27-13-08-07 | ECLASS 9.1 | 27-13-08-07 |
| ECLASS 10.0 | 27-13-08-07 | ECLASS 11.0 | 27-13-08-07 |
| ECLASS 12.0 | 27-17-90-90 | ECLASS 13.0 | 27-17-90-90 |

VSSC4 CL 24VAC/DC 0.5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Tender specification sheets

Long specification

Surge protection in a one piece, 6.2 mm wide DIN rail module for a signal circuit with 24 V UC, 2-wire technology. A current loop with max. 0.5 A can be protected here. When the terminal is fitted, a simultaneous electrically conducting contact is made between the mounting rail (earth) and the reference potential (ground) of the protection circuit in the terminal. Optical identification of the terminal based on the type of protected switching and the voltage level. The terminal can be labelled or marked.

Short specification

Surge protection in a one piece, 6.2 mm wide DIN rail module for a signal circuit with 2-wire technology. Version: 24V UC

Environmental Product Compliance

REACH SVHC

Lead 7439-92-1

SCIP

71e97bb7-979f-4330-94c0-20c629bb05e3

Important note

Product information

Mode 2: State where the voltage-limiting part of the SPD was short-circuited due to a very low impedance within the SPD. The line is inoperable, but the measuring equipment is still protected by means of a short-circuit.

Approvals

Approvals



ROHS

Conform

UL File Number Search

UL Website

Certificate No. (UL)

E311081

Downloads

Approval/Certificate/Document of Conformity

[SIL Paper](#)
[EU Konformitätserklärung / EU Declaration of Conformity](#)

Engineering Data

[CAD data – STEP](#)

User Documentation

[Beipackzettel / Instruction sheet](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

VSSC4 CL 24VAC/DC 0.5A


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings



Similar to illustration

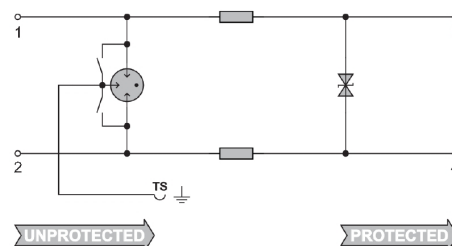

Circuit diagram



VSSC4 CL 24VAC/DC 0.5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/5 MC NE WS | Version |
| Order No. | 1609801044 | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4008190397111 | Weidmueller, white |
| Qty. | 1,000 pc(s). | |

Accessories (end plates)

End plates (AP) for the VSSC product series in light blue and black



General ordering data

| | | |
|------------|----------------------------|-----------------|
| Type | AP VSSC4 | Version |
| Order No. | 1063120000 | VSSC, End plate |
| GTIN (EAN) | 4032248947560 | |
| Qty. | 50 pc(s). | |