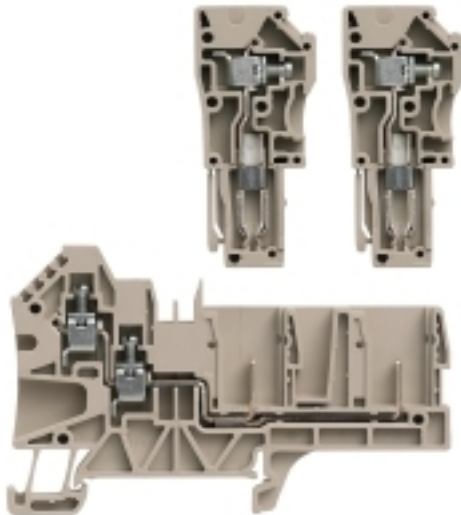


**WT4 4AN/2****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Some applications demand for a pluggable, modular solution to be more flexible or to facilitate the installation. Where complete functional units have to be prefabricated or replaced, modular and flexible connection systems are required. Our pluggable terminal blocks can be quickly assembled and are completely factory tested.

**General ordering data**

|            |   |
|------------|---|
| Version    | W-Series, Feed-through terminal, Rated control voltage: |
| Order No.  | <a href="#">1107680000</a>                              |
| Type       | WT4 4AN/2   |
| GTIN (EAN) | 4032248882649   |
| Qty.       | 50 pc(s).   |

## WT4 4AN/2

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 50 mm      | Depth (inches) | 1.969 inch |
| Depth including DIN rail | 50.7 mm    | Height         | 84.3 mm    |
| Height (inches)          | 3.319 inch | Width          | 6.1 mm     |
| Width (inches)           | 0.24 inch  | Net weight     | 13.98 g    |

## Temperatures

|                                  |                |                                  |        |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature              | -25 °C...55 °C | Continuous operating temp., min. | -50 °C |
| Continuous operating temp., max. | 120 °C         |                                  |        |

## Material data

|                           |       |        |            |
|---------------------------|-------|--------|------------|
| Material                  | Wemid | Colour | dark beige |
| UL 94 flammability rating | V-0   |        |            |

## System specifications

|                               |   |                                     |       |
|-------------------------------|---|-------------------------------------|-------|
| Version                       | 2 screw connections - 2 plug-in connections, for plug-in cross-connector, One end without connector | End cover plate required            | Yes   |
| Number of levels              | 1   | Number of clamping points per level | 1     |
| Number of potentials per tier | 1   | Levels cross-connected internally   | No    |
| PE connection                 | No  | Rail                                | TS 35 |

## Additional technical data

|                          |         |            |       |
|--------------------------|---------|------------|-------|
| Explosion-tested version | No      | Open sides | right |
| Type of mounting         | Snap-on |            |       |

## Conductors for clamping (rated connection)

|   |                     |   |                     |
|---|---------------------|---|---------------------|
| Blade size  | 0.6 x 3.5 mm        | Clamping range, max.  | 6 mm <sup>2</sup>   |
| Clamping range, min.  | 0.5 mm <sup>2</sup> | Clamping screw  | M 3                 |
| Connection cross-section, stranded, max.  | 6 mm <sup>2</sup>   | Connection cross-section, stranded, min.  | 0.5 mm <sup>2</sup> |
| Connection direction  | on side             | Gauge to IEC 60947-1  | A4                  |
| Number of connections   | 4                   | Stripping length  | 9 mm                |
| Tightening torque, max.   | 0.6 Nm              | Tightening torque, min.   | 0.5 Nm              |
| Type of connection  | Screw connection    | Wire connection cross section AWG, max.   | AWG 10              |
| Wire connection cross section AWG, min.   | AWG 26              | Wire connection cross section, finely stranded, max.                                    | 4 mm <sup>2</sup>   |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup> | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm <sup>2</sup>   |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup> | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 4 mm <sup>2</sup>   |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup> | Wire connection cross-section, solid core, max.   | 6 mm <sup>2</sup>   |
| Wire connection cross-section, solid core, min.   | 0.5 mm <sup>2</sup> |   |                     |

## WT4 4AN/2

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## General

|   |        |   |                                  |
|---|--------|---|----------------------------------|
| Rail                                    | TS 35  | Standards                               | In accordance with IEC 60947-7-1 |
| Wire connection cross section AWG, max. | AWG 10 | Wire connection cross section AWG, min. | AWG 26                           |

## Rating data

|  |                   |                                 |                                  |
|--|-------------------|---------------------------------|----------------------------------|
| Rated cross-section                          | 4 mm <sup>2</sup> | Rated voltage                   | 800 V                            |
| Rated DC voltage                             | 800 V             | Rated current                   | 32 A                             |
| Current at maximum wires                     | 32 A              | Standards                       | In accordance with IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1 mΩ              | Rated impulse withstand voltage | 8 kV                             |
| Power loss in accordance with IEC 60947-7-x  | 1.02 W            | Pollution severity              | 3                                |

## UL rating data

|  |        |  |        |
|--|--------|--|--------|
| Certificate No. (cURus)                    | E60693 | Conductor size Factory wiring max. (cURus) | 10 AWG |
| Conductor size Factory wiring min. (cURus) | 26 AWG | Conductor size Field wiring max. (cURus)   | 10 AWG |
| Conductor size Field wiring min. (cURus)   | 26 AWG | Current size B (cURus)                     | 30 A   |
| Current size C (cURus)                     | 30 A   | Current size D (cURus)                     | 5 A    |
| Voltage size B (cURus)                     | 600 V  | Voltage size C (cURus)                     | 600 V  |
| Voltage size D (cURus)                     | 600 V  | Wire cross section max. (cURus)            | 10 AWG |
| Wire cross section min. (cURus)            | 26 AWG |  |        |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 7.0    | EC000897    | ETIM 8.0    | EC000897    |
| ETIM 9.0    | EC000897    | ECLASS 11.0 | 27-14-11-20 |
| ECLASS 12.0 | 27-14-11-20 | ECLASS 13.0 | 27-25-01-17 |

## Environmental Product Compliance

REACH SVHC /

## Approvals

Approvals



|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate No. (cURus) | E60693     |

## WT4 4AN/2

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

|   |  |
|---|--|
| Approval/Certificate/Document of Conformity | <a href="#">CE Declaration of Conformity</a><br><a href="#">UKCA declaration of conformity</a><br><a href="#">Confirmation of Standards EN 45545-2_2020-10</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>  |
| Engineering Data                            | <a href="#">Zuken E3.S</a>   |
| User Documentation                          | <a href="#">StorageConditionsTerminalBlocks</a>  |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>   |
| Brochures                                   |  |

### WT4 4AN/2

**Weidmüller Interface GmbH & Co. KG**


Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings



## WT4 4AN/2

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

4 mm<sup>2</sup>

The plugs for our WeiCoS-System are available for all different connection systems. The product range includes preassembled connectors from 1 to 10 poles and the possibility of an individual assembly. This ensures maximum flexibility for every application. The customized accessories increase the safety and protection against environmental influences.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | ZP 4/1AN/10                | Version   |
| Order No.  | <a href="#">1855070000</a> | Z-series, Plug-in connector, beige, Direct mounting |
| GTIN (EAN) | 4032248396146              |   |
| Qty.       | 10 pc(s).                  |   |
| Type       | ZP 4/1AN                   | Version   |
| Order No.  | <a href="#">1051970000</a> | Z-series, Plug-in connector, Direct mounting        |
| GTIN (EAN) | 4032248792351              |   |
| Qty.       | 50 pc(s).                  |   |

## DEK 5/6



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data


|            |                            |  |
|------------|----------------------------|--|
| Type       | DEK 5/6 MM WS              | Version  |
| Order No.  | <a href="#">2007120000</a> | Dekafix, Terminal marker, 5 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392104              |  |
| Qty.       | 600 pc(s).                 |  |

**WT4 4AN/2****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****4 mm<sup>2</sup>**

4  
mm<sup>2</sup>

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

**General ordering data**

|            |                            |                                 |
|------------|----------------------------|---------------------------------|
| Type       | ZQV 4N/2 GE                | Version                         |
| Order No.  | <a href="#">1758250000</a> | W-Series, Cross-connector, 32 A |
| GTIN (EAN) | 4032248169795              |                                 |
| Qty.       | 60 pc(s).                  |                                 |
| Type       | ZQV 4N/4 GE                | Version                         |
| Order No.  | <a href="#">1762620000</a> | W-Series, Cross-connector, 32 A |
| GTIN (EAN) | 4032248169771              |                                 |
| Qty.       | 60 pc(s).                  |                                 |
| Type       | ZQV 4N/10 GE               | Version                         |
| Order No.  | <a href="#">1758260000</a> | W-Series, Cross-connector, 32 A |
| GTIN (EAN) | 4032248169764              |                                 |
| Qty.       | 20 pc(s).                  |                                 |
| Type       | ZQV 4N/3 GE                | Version                         |
| Order No.  | <a href="#">1762630000</a> | W-Series, Cross-connector, 32 A |
| GTIN (EAN) | 4032248169788              |                                 |
| Qty.       | 60 pc(s).                  |                                 |

**Slotted screwdriver**

Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

**General ordering data**

|            |                            |                          |
|------------|----------------------------|--------------------------|
| Type       | SDS 0.6X3.5X100            | Version                  |
| Order No.  | <a href="#">9008330000</a> | Screwdriver, Screwdriver |
| GTIN (EAN) | 4032248056286              |                          |
| Qty.       | 1 pc(s).                   |                          |

**WT4 4AN/2****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany


[www.weidmueller.com](http://www.weidmueller.com)**Accessories****4 mm<sup>2</sup>**

4  
mm<sup>2</sup>

The plugs for our WeiCoS-System are available for all different connection systems. The product range includes preassembled connectors from 1 to 10 poles and the possibility of an individual assembly. This ensures maximum flexibility for every application. The customized accessories increase the safety and protection against environmental influences.

**General ordering data**

|            |                            |                             |
|------------|----------------------------|-----------------------------|
| Type       | WP4/1AN/10                 | Version                     |
| Order No.  | <a href="#">1107800000</a> | W-Series, Plug-in connector |
| GTIN (EAN) | 4032248882922              |                             |
| Qty.       | 10 pc(s).                  |                             |
| Type       | WP4/1AN/1                  | Version                     |
| Order No.  | <a href="#">1107790000</a> | W-Series, Plug-in connector |
| GTIN (EAN) | 4032248882915              |                             |
| Qty.       | 50 pc(s).                  |                             |
| Type       | WP4/1AN/1 ZA               | Version                     |
| Order No.  | <a href="#">1108490000</a> | W-Series, Plug-in connector |
| GTIN (EAN) | 4032248884063              |                             |
| Qty.       | 50 pc(s).                  |                             |

**Coding elements**

Through the use of coding pins, individual coding options ensure trouble-free plug-in connection.

**General ordering data**

|            |                            |   |
|------------|----------------------------|---|
| Type       | KOSF ZT4                   | Version                                   |
| Order No.  | <a href="#">1856860000</a> | Z-series, Coding element, Direct mounting |
| GTIN (EAN) | 4032248400744              |   |
| Qty.       | 50 pc(s).                  |   |



**WT4 4AN/2****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****4 mm<sup>2</sup>**

End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

**General ordering data**

|            |                            |  |
|------------|----------------------------|--|
| Type       | WAP WT4/4AN/2              | Version  |
| Order No.  | <a href="#">1107780000</a> | End plate (terminals), 81.45 mm x 1.5 mm, dark beige |
| GTIN (EAN) | 4032248882663              |  |
| Qty.       | 50 pc(s).                  |  |

**Locking elements**

The plugs can be securely and easily fixed to the base terminal by using a locking element. The locking element avoids an unintentional disconnection of the plugs from the base terminal and ensures maximum safety.

**General ordering data**

|            |                            |  |
|------------|----------------------------|--|
| Type       | ZVR ZP4                    | Version                                  |
| Order No.  | <a href="#">1855250000</a> | Z-series, Locking clips, Direct mounting |
| GTIN (EAN) | 4032248396481              |  |
| Qty.       | 25 pc(s).                  |  |

## WT4 4AN/2

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Strain reliefs



The strain relief protects the contact against mechanical stress and protects the connector against inadvertent release from the contact point.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | ZZE ZP4                    | Version                                  |
| Order No.  | <a href="#">1855260000</a> | Z-series, Strain relief, Direct mounting |
| GTIN (EAN) | 4032248396498              |  |
| Qty.       | 25 pc(s).                  |  |

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/6 MC NE WS           | Version   |
| Order No.  | <a href="#">1609820000</a> | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190203436              | Weidmueller, white  |
| Qty.       | 1,000 pc(s).               |   |

## WT4 4AN/2

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## General ordering data

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | BZT 1 WS 10/5              | Version                    |
| Order No.  | <a href="#">1805490000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231              |                            |
| Qty.       | 100 pc(s).                 |                            |
| Type       | BZT 1 ZA WS 10/5           | Version                    |
| Order No.  | <a href="#">1805520000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248              |                            |
| Qty.       | 100 pc(s).                 |                            |

## W-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | WEW 35/2                   | Version  |
| Order No.  | <a href="#">1061200000</a> | End bracket, Wemid, dark beige, Rail: TS 35, when screwed in |
| GTIN (EAN) | 4008190030230              |  |
| Qty.       | 50 pc(s).                  |  |