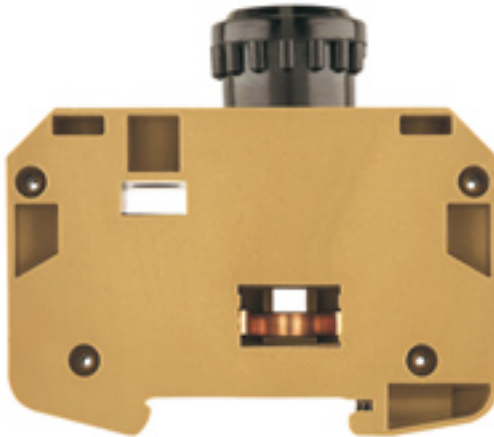


SAKS 2/35**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

In some applications it is useful to protect the feed through connection with a separate fuse. Fuse terminal blocks are made up of one terminal block bottom section with a fuse insertion carrier. The fuses vary from pivoting fuse levers and pluggable fuse holders to screwable closures and flat plug-in fuses.

General ordering data

| | |
|-----------------|---|
| Version | Fuse terminal, Screw connection, Fuse cartridge, for screwable cross-connection, One end without connector, Screw connection, 10 mm², 500 V, 10 A, E16, medium yellow |
| Order No. | 1368720000 |
| Type | SAKS 2/35 |
| GTIN (EAN) | 4008190047818 |
| Qty. | 20 pc(s). |
| Delivery status | This article will no longer be available in the future. |
| Available until | 2024-12-31 |

Creation date July 5, 2024 1:17:31 AM CEST

Catalogue status 29.06.2024 / We reserve the right to make technical changes.

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|--------------------------|------------|----------------|------------|
| Depth | 73.5 mm | Depth (inches) | 2.894 inch |
| Depth including DIN rail | 75 mm | Height | 80 mm |
| Height (inches) | 3.15 inch | Width | 27.6 mm |
| Width (inches) | 1.087 inch | Net weight | 110.85 g |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature | -25 °C...55 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C | | |

Material data

| | | | |
|---------------------------|----------|--------|---------------|
| Material | KrG | Colour | medium yellow |
| UL 94 flammability rating | V-0, 5VA | | |

System specifications

| | | | |
|-------------------------------------|---|-------------------------------|----|
| Version | Screw connection, Fuse cartridge, for screwable cross-connection, One end without connector | End cover plate required | No |
| Number of potentials | 1 | Number of levels | 1 |
| Number of clamping points per level | 2 | Number of potentials per tier | 1 |
| Levels cross-connected internally | No | PE connection | No |
| Rail | TS 35 | N-function | No |
| PE function | No | PEN function | No |

Additional technical data

| | | | |
|-----------------------------|---------|---------------------|-----------------|
| Explosion-tested version | No | Installation advice | Direct mounting |
| Number of similar terminals | 1 | Open sides | closed |
| Type of mounting | Snap-on | | |

CSA rating data

| | | | |
|-------------------------------|-----------|-------------------------------|-------|
| Certificate No. (CSA) | 12400-194 | Current size B (CSA) | 25 A |
| Current size C (CSA) | 25 A | Current size D (CSA) | 5 A |
| Voltage size B (CSA) | 600 V | Voltage size C (CSA) | 600 V |
| Voltage size D (CSA) | 600 V | Wire cross section max. (CSA) | 8 AWG |
| Wire cross section min. (CSA) | 22 AWG | | |

Conductors for clamping (additional connection)

| | |
|---|--------------------|
| Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. | 10 mm ² |
|---|--------------------|

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

| | | | |
|---|----------------------|---|---------------------|
| Blade size | 1.0 x 5.5 mm | Clamping range, max. | 16 mm ² |
| Clamping range, min. | 0.33 mm ² | Clamping screw | M 4 |
| Connection cross-section, stranded, max. | 10 mm ² | Connection cross-section, stranded, min. | 0.5 mm ² |
| Connection direction | on side | Gauge to IEC 60947-1 | B6 |
| Number of connections | 2 | Stripping length | 12 mm |
| Tightening torque, max. | 2.4 Nm | Tightening torque, min. | 1.2 Nm |
| Torque level with DMS electric screwdriver | 4 | Type of connection | Screw connection |
| Wire connection cross section AWG, max. | AWG 8 | Wire connection cross section AWG, min. | AWG 22 |
| Wire connection cross section, finely stranded, max. | 10 mm ² | Wire connection cross section, finely stranded, min. | 0.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 10 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm ² |
| Wire connection cross-section, solid core, max. | 16 mm ² | Wire connection cross-section, solid core, min. | 0.5 mm ² |

Display element

| | | | |
|-------------------------------------|-------|-------------------------------|-------|
| Operating voltage for display, max. | 500 V | Type of voltage for indicator | AC/DC |
|-------------------------------------|-------|-------------------------------|-------|

Fuse terminals

| | | | |
|--------------------------------|------------------|-------------------------|-------------|
| Cartridge fuse | E16 | Display | Without LED |
| Fuse holder (cartridge holder) | for screw fixing | Operating voltage, max. | 500 V |
| Type of voltage for indicator | AC/DC | | |

General

| | | | |
|---|-----------------|---|-------|
| Installation advice | Direct mounting | Rail | TS 35 |
| Standards | IEC 60947-7-3 | Wire connection cross section AWG, max. | AWG 8 |
| Wire connection cross section AWG, min. | AWG 22 | | |

Rating data

| | | | |
|--|--------------------|---------------------------------|---------------|
| Rated cross-section | 10 mm ² | Rated voltage | 500 V |
| Rated DC voltage | 500 V | Rated current | 10 A |
| Current at maximum wires | 10 A | Standards | IEC 60947-7-3 |
| Volume resistance according to IEC 60947-7-x | 0.56 mΩ | Rated impulse withstand voltage | 6 kV |
| Power loss in accordance with IEC 60947-7-x | 1.82 W | Pollution severity | 3 |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000899 | ETIM 7.0 | EC000899 |
| ETIM 8.0 | EC000899 | ETIM 9.0 | EC000899 |
| ECLASS 9.0 | 27-14-11-16 | ECLASS 9.1 | 27-14-11-16 |
| ECLASS 10.0 | 27-14-11-16 | ECLASS 11.0 | 27-14-11-16 |
| ECLASS 12.0 | 27-14-11-16 | ECLASS 13.0 | 27-25-01-13 |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Environmental Product Compliance

REACH SVHC

/

Important note

Product information

The voltage depends on the selected fuse element or the selected indicator light

Approvals

Approvals



ROHS

Conform

Downloads

| | |
|---|--|
| Approval/Certificate/Document of Conformity | DNVGL certificate Declaration of Conformity UKCA declaration of conformity |
| Engineering Data | CAD data – STEP |
| Engineering Data | Zuken E3.S |
| User Documentation | StorageConditionsTerminalBlocks |
| Catalogues | Catalogues in PDF-format |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/8 MC NE WS | Version |
| Order No. | 1856740000 | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400850 | Weidmueller, white |
| Qty. | 800 pc(s). | |

Screws



Depending on the terminal block or also accessories, we offer different types of screws as additional items or also spare parts.

General ordering data

| | | |
|------------|----------------------------|---------------------------|
| Type | BFSC M4X9T | Version |
| Order No. | 0103300000 | Mounting screw (Terminal) |
| GTIN (EAN) | 4008190023348 | |
| Qty. | 100 pc(s). | |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6.5 MC NE WS | Version |
| Order No. | 1609840000 | Dekafix, Terminal marker, 5 x 6.5 mm, Pitch in mm (P): 6.50 |
| GTIN (EAN) | 4008190203429 | Weidmueller, white |
| Qty. | 900 pc(s). | |

Insulation caps



With our accessories for the bus bar taps, you can quickly and easily insulate the tap terminals and visualize the potential through the color coding.

General ordering data

| | | |
|------------|----------------------------|-------------------------------------|
| Type | IK 16/ZB16 BL | Version |
| Order No. | 0502980000 | Terminal (busbar connection) |
| GTIN (EAN) | 4008190159696 | |
| Qty. | 50 pc(s). | |
| Type | IK 16/ZB16 GG | Version |
| Order No. | 0502960000 | Cover hood (terminal), Polyamide 66 |
| GTIN (EAN) | 4008190113438 | |
| Qty. | 50 pc(s). | |
| Type | IK 35/ZB35 BL | Version |
| Order No. | 0502780000 | Terminal (busbar connection) |
| GTIN (EAN) | 4008190141455 | |
| Qty. | 50 pc(s). | |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

SAK-Series



SAK Series

End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | AP KSKM | Version |
| Order No. | 9509630000 | SAK Series, End plate, 1.5 mm, beige, Direct mounting |
| GTIN (EAN) | 4008190456771 | |
| Qty. | 20 pc(s). | |

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 MC NE WS | Version |
| Order No. | 1609820000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190203436 | Weidmueller, white |
| Qty. | 1,000 pc(s). | |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

Accessories

6.3x32



For protection against overcurrent, we offer cartridge fuse with dimensions 6.3x32 mm in sizes from 500 mA to 12.5 A.

General ordering data

| | | |
|------------|----------------------------|------------|
| Type | VH 25.4/6.3/4.3 | Version |
| Order No. | 0446200000 | Dummy fuse |
| GTIN (EAN) | 4008190519759 | |
| Qty. | 10 pc(s). | |

Steel



Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | TS 32X15/LL 2M/ST/ZN | Version |
| Order No. | 0514400000 | Terminal rail, with slot, Accessories, 33 x 15 x 2000 mm, Slit width: |
| GTIN (EAN) | 4008190086152 | 5.20 mm, Slit length: 25.00 mm, Steel, galvanic zinc plated and |
| Qty. | 2 m | passivated |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 MC SDR | Version |
| Order No. | 1609830000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190456603 | Weidmueller, To customer specification |
| Qty. | 200 pc(s). | |

Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/8 PLUS MC SDR | Version |
| Order No. | 1046370000 | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248782079 | Weidmueller, To customer specification |
| Qty. | 160 pc(s). | |

SAKS 2/35**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories**

| | | |
|------------|----------------------------|---|
| Type | DEK 5/8 MC SDR | Version |
| Order No. | 1856750000 | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400867 | Weidmueller, To customer specification |
| Qty. | 160 pc(s). | |

TS 32**TS 32**

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | WEW 32/1 | Version |
| Order No. | 1067600000 | End bracket, PA 66 GF 30, dark beige, Rail: TS 32, when screwed in |
| GTIN (EAN) | 4008190099657 | |
| Qty. | 50 pc(s). | |
| Type | EWK 2 | Version |
| Order No. | 0199360000 | End bracket, Wemid, beige, Rail: TS 32, when screwed in |
| GTIN (EAN) | 4008190023546 | |
| Qty. | 50 pc(s). | |
| Type | EWK 1 ALT | Version |
| Order No. | 0495160000 | End bracket, Polyamide 66, beige, Rail: TS 32, when screwed in |
| GTIN (EAN) | 4008190160777 | |
| Qty. | 50 pc(s). | |
| Type | EWK 1 | Version |
| Order No. | 0206160000 | End bracket, Wemid, beige, Rail: TS 32, when screwed in |
| GTIN (EAN) | 4008190080020 | |
| Qty. | 50 pc(s). | |

SAKS 2/35**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Custom printing**

The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6.5 MC SDR | Version |
| Order No. | 1609850000 | Dekafix, Terminal marker, 5 x 6.5 mm, Pitch in mm (P): 6.50 |
| GTIN (EAN) | 4008190456610 | Weidmueller, To customer specification |
| Qty. | 180 pc(s). | |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

DEK 5/6



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.


Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | DEK 5/6 MM WS | Version |
| Order No. | 2007120000 | Dekafix, Terminal marker, 5 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392104 | |
| Qty. | 600 pc(s). | |

E 16



Weidmueller offers NEOZED fuses in E 16 design in sizes from 10 A to 25 A.

General ordering data

| | | |
|------------|----------------------------|-----------------------------------|
| Type | E 16/25A GE TNDZ | Version |
| Order No. | 0208800000 | Active components, Cartridge fuse |
| GTIN (EAN) | 4008190037314 | |
| Qty. | 25 pc(s). | |
| Type | E 16/10A RT TNDZ | Version |
| Order No. | 0208500000 | Active components, Cartridge fuse |
| GTIN (EAN) | 4008190067120 | |
| Qty. | 25 pc(s). | |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|-----------------------------------|
| Type | E 16/16A GR TNDZ | Version |
| Order No. | 0208600000 | Active components, Cartridge fuse |
| GTIN (EAN) | 4008190015121 | |
| Qty. | 25 pc(s). | |
| Type | E 16/20A BL TNDZ | Version |
| Order No. | 0208700000 | Active components, Cartridge fuse |
| GTIN (EAN) | 4008190044886 | |
| Qty. | 25 pc(s). | |

DEK 5/8



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | DEK 5/8 MM WS | Version |
| Order No. | 2007130000 | Dekafix, Terminal marker, 5 x 8 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392012 | |
| Qty. | 500 pc(s). | |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

SAK-Series

SAK
Series

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | EW 35 | Version |
| Order No. | 0383560000 | End bracket, Wemid, beige, Rail: TS 35, when screwed in |
| GTIN (EAN) | 4008190181314 | |
| Qty. | 50 pc(s). | |

Plus



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/8 PLUS MC NE WS | Version |
| Order No. | 1046350000 | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248782055 | Weidmueller, white |
| Qty. | 800 pc(s). | |

SAKS 2/35

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

SchT group marker carrier



The SchT 5 S group tag carriers are clipped directly onto the TS 32 mounting rail (G-rail) or the TS 35 mounting rail (top-hat rail). It is therefore possible to label the terminal strip irrespective of the terminal and the type of terminal. SchT 5 and SchT 5 S are fitted with ESO 5, STR 5 protective strips.

The SchT 7 is a hinged group tag carrier for inlay tags which enables easy access to the clamping screw. The SchT 7 is fitted with ESO 7, STR 7 protective strips or DEK 5.

Inlay tags and protective strips can be found under "Accessories".

General ordering data

| Type | Version |
|--------------------------------------|---|
| SCHT 7 | SCHT, Terminal marker, 39.3 x 8 mm, Pitch in mm (P): 7.00 |
| Order No. 0517960000 | Weidmueller, white |
| GTIN (EAN) 4008190001742 | |
| Qty. 20 pc(s). | |

Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

General ordering data

| Type | Version |
|--------------------------------------|----------------------------|
| BZT 1 WS 10/5 | Accessories, Marker holder |
| Order No. 1805490000 | |
| GTIN (EAN) 4032248270231 | |
| Qty. 100 pc(s). | |
| Type | Version |
| BZT 1 ZA WS 10/5 | Accessories, Marker holder |
| Order No. 1805520000 | |
| GTIN (EAN) 4032248270248 | |
| Qty. 100 pc(s). | |

SAKS 2/35**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Connection sleeves****General ordering data**

| | | |
|------------|----------------------------|------------|
| Type | VH 20/5/3.4 | Version |
| Order No. | 0446100000 | Dummy fuse |
| GTIN (EAN) | 4008190519742 | |
| Qty. | 10 pc(s). | |