

SAISC-M-4/8S-M12-D-COD**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Individual cable lengths are often required nowadays. In order to meet these demands, Weidmüller offers a wide range of plug-in connectors for custom assembly.

Male plugs and female socket for customisable assembly for M8, M12, M16 and 7/8" connections which are highly robust and ideally suited to machine engineering, for instance. The M12 plug-in connectors offer a choice of 5 different connection systems.

The crimp connection is characterised by high functional reliability. With this connection technology, the conductor is crimped to the contact and then engaged in the contact carrier. The connection between the conductor and crimp is vibration-resistant and boasts long-term stability. Crimp contacts are to be ordered separately.

General ordering data

| | |
|------------|--|
| Version | Field attachable connector, M12, pin, straight |
| Order No. | 1467840000 |
| Type | SAISC-M-4/8S-M12-D-COD |
| GTIN (EAN) | 4050118273441 |
| Qty. | 1 pc(s). |

SAISC-M-4/8S-M12-D-COD

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | |
|------------|------|
| Net weight | 43 g |
|------------|------|

Technical data customisable plug-in connectors

| | | | |
|--------------------------------|---------------------|--------------------------------|----------------------|
| Cable diameter | 5...8 mm | Cable diameter, max. | 8 mm |
| Cable diameter, min. | 5 mm | Coding | D-coded |
| Conductor cross-section, max. | 0.5 mm ² | Conductor cross-section, min. | 0.34 mm ² |
| Connection cross-section, max. | 0.5 mm ² | Connection cross-section, min. | 0.34 mm ² |
| Contact surface | Gold-plated | Housing main material | CuZn |
| Number of poles | 4 | Plugging cycles | ≥ 200 |
| Pollution severity | 3 | Protection degree | IP67 |
| Rated current | 4 A | Rated voltage | 250 V |
| Shield connection | Yes | Temperature range of housing | -40 ... +85 °C |
| Threaded ring material | Diecast zinc | Type of connection | Crimp connection |

General Info

| | | | |
|-------------------|-------|-----------------------|-------------|
| Number of poles | 4 | Connection 1 | M12 |
| Connection 2 | Crimp | Housing main material | CuZn |
| Connection thread | M12 | Contact surface | Gold-plated |
| Protection degree | IP67 | Plugging cycles | ≥ 200 |

Electrical properties

| | |
|---------------|-------|
| Rated voltage | 250 V |
|---------------|-------|

General standards

| | |
|--------------------|-----------------|
| Connector standard | IEC 61076-2-101 |
|--------------------|-----------------|

Standards

| | |
|--------------------|-----------------|
| Connector standard | IEC 61076-2-101 |
|--------------------|-----------------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC002635 | ETIM 7.0 | EC002635 |
| ETIM 8.0 | EC002635 | ETIM 9.0 | EC002635 |
| ECLASS 9.0 | 27-44-01-02 | ECLASS 9.1 | 27-44-01-03 |
| ECLASS 10.0 | 27-44-01-02 | ECLASS 11.0 | 27-44-01-02 |
| ECLASS 12.0 | 27-44-01-16 | ECLASS 13.0 | 27-44-01-02 |

Environmental Product Compliance

| | |
|------------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1 |
| SCIP | ebf89fc8-a87f-4691-b87a-dfb9921774b4 |

SAISC-M-4/8S-M12-D-COD**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Approvals**

Approvals



ROHS

Conform

DownloadsApproval/Certificate/Document of Con-
formity[PROFINET Manufacturer's Declaration](#)

Engineering Data

[CAD data – STEP](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

[FL FIELDWIRING EN](#)
[FL FIELDWIRING EN](#)


SAISC-M-4/8S-M12-D-COD

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Pole scheme

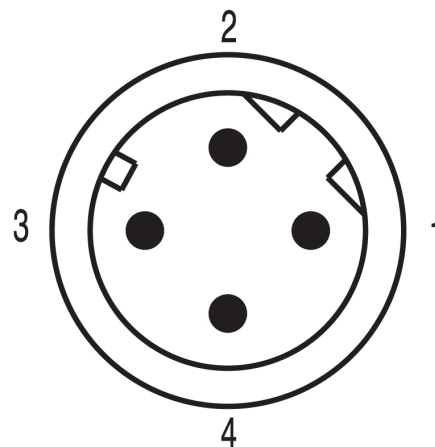

SAISC-M-4/8S-M12-D-COD**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****M12 crimp contacts**

Individual cable lengths are often required nowadays. In order to meet these demands, Weidmüller offers a wide range of plug-in connectors for custom assembly. Male plugs and female socket for customisable assembly for M8, M12, M16 and 7/8" connections which are highly robust and ideally suited to machine engineering, for instance. The M12 plug-in connectors offer a choice of 5 different connection systems.

The crimp connection is characterised by high functional reliability. With this connection technology, the conductor is crimped to the contact and then engaged in the contact carrier. The connection between the conductor and crimp is vibration-resistant and boasts long-term stability.

Crimp contacts are to be ordered separately.

General ordering data

| | | |
|------------|----------------------------|--------------|
| Type | SAI-M12-KSC-0.34/0.5 | Version |
| Order No. | 1468860000 | Contact, Pin |
| GTIN (EAN) | 4050118273984 | |
| Qty. | 100 pc(s). | |