

**VPU II 1 1000V/40KA AC****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Similar to illustration

Weidmüller VPU I (Type I), VPU II (Type II) and VPU III (Type III) surge protection products effectively reduce the interference coupling that can occur due to transient surge voltages, even significantly below the limits prescribed by insulation co-ordination according to EN 60664-3 / DIN VDE 0110-3. This means that the whole installation is exposed to fewer malfunctions. The arresters are co-ordinated using technical means. This means that decoupling between Types I, II and III is unnecessary. The arresters are tested according to product standard IEC 61643-11 / DIN EN 61643-11 and can be installed in systems according to IEC 61643-12 / VDE 0675-6-12 and IEC 62305-4 / VDE 0185-4. This lightning and surge protection device is suited for installation in power supply systems. Weidmüller offers different products depending on the particular mains network type and voltage level. A special Type I and Type II protective device is even available for photovoltaic applications.

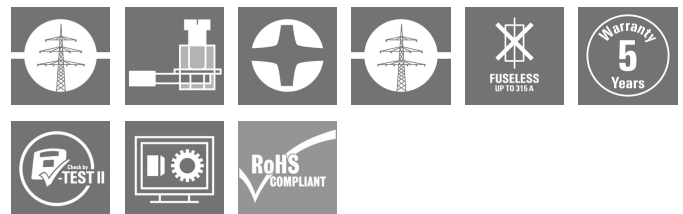**General ordering data**

Version	Surge voltage arrester, Low voltage, without telecomm. contact, Single-phase
Order No.	<a href="#">1473440000</a>
Type	VPU II 1 1000V/40KA AC
GTIN (EAN)	4050118279689
Qty.	1 pc(s).
Replacement parts	<a href="#">1549700000</a>

## VPU II 1 1000V/40KA AC

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	69 mm	Depth (inches)	2.717 inch
Height	94 mm	Height (inches)	3.701 inch
Width	17.8 mm	Width (inches)	0.701 inch
Mounting dimension - height	75 mm	Net weight	194.22 g

## Temperatures

Storage temperature	-40 °C...80 °C	Operating temperature	-40 °C...70 °C
Humidity	5 - 95% rel. humidity		

## General data

Colour	black, orange	Design	Installation housing; 1TE, Insta IP 20
Optical function display	green = OK; red = arrester is defective - replace	Protection degree	IP20
Rail	TS 35	UL 94 flammability rating	V-0
Version	without telecomm. contact		

## Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

## Rated data IEC / EN

Discharge current $I_{\max}$ (8/20 $\mu$ s) wire-PE	40 kA	Discharge current $I_n$ (8/20 $\mu$ s) wire-PE	20 kA
Energy coordination ( $\leq 10$ m)	Type II, Type III	Follow-on current extinguishing capability $I_{fi}$	Not available due for technical reasons
Fuse	125 A gL > (if back up fuse > 125 A), No Fuse necessary $\leq 125$ A gG	Leakage current at $U_n$	0.7 mA
Low voltage network	Single-phase	Max. continuous voltage, $U_c$ (AC)	1000 V
Number of poles	1	Protection level $U_p$ at $I_N$ (L/N-PE)	$\leq 3.7$ kV
Rated voltage (AC)	830 V	Requirements category acc. to IEC 61643-11	Type II
Requirements class, acc. to EN 61643-11	T2	Response time	$\leq 25$ ns
Short-circuit current rating $I_{SCCR}$	25 kA	Signalling contact	No
Standards	IEC61643-11, EN61643-11	Temporary surge voltage (over-voltage) - TOV	1,205 V
Voltage type	AC		

## VPU II 1 1000V/40KA AC

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Connection data

Stripping length	15 mm	Wire connection method	Screw connection
Type of connection	Screw connection	Stripping length, rated connection	15 mm
Tightening torque, min.	2 Nm	Tightening torque, max.	3 Nm
Clamping range, rated connection	16 mm <sup>2</sup>	Clamping range, min.	1.5 mm <sup>2</sup>
Clamping range, max.	35 mm <sup>2</sup>	Wire cross-section, solid, min.	1.5 mm <sup>2</sup>
Wire cross-section, solid, max.	16 mm <sup>2</sup>	Wire connection cross section, finely stranded, min.	1.5 mm <sup>2</sup>
Wire connection cross section, finely stranded, max.	25 mm <sup>2</sup>	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	1.5 mm <sup>2</sup>
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	50 mm <sup>2</sup>	Connection cross-section, stranded, min.	1.5 mm <sup>2</sup>
Connection cross-section, stranded, max.	50 mm <sup>2</sup>		

## Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ETIM 9.0	EC000941
ECLASS 9.0	27-13-08-05	ECLASS 9.1	27-13-08-05
ECLASS 10.0	27-13-08-05	ECLASS 11.0	27-13-08-05
ECLASS 12.0	27-17-90-90	ECLASS 13.0	27-17-90-90

## VPU II 1 1000V/40KA AC

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Tender specification sheets

## Long specification

Multi-pole lightning arrester in accordance with level II requirements (IEC 61643-11, EN61643-11:2013). The arrester provides overvoltage protection in applications in acc. with IEC 61643-12. The use of a high-performance varistor meets the inspection requirements for level II surge protection devices (SPD) on the basis of the standards. The arrester is installed in the vicinity of the power supply for the equipment requiring protection, in a commercially available installation/electrical distribution housing. The VPU II 1 1000 V/40 kA AC is used in the single-phase mains network. With thermal cut-off mechanism on the varistor. In case of insufficient protection, the colour in the display window changes from green to red. Rated voltage: 1000V AC  
In/max (8/20µs): 20/40 kA protection level < 3.8 kV 25 kA short-circuit strength with max. backup fuse of 250A of the same type: Weidmüller VPU II 1 1000V/40KA AC Order no. 1473440000 or equivalent.

## Short specification

Class II arrester with In/Imax: 20/40 kA, suitable for single-phase 1000 V mains systems. Protection level < 3.8 kV. Type: Weidmüller VPU II 1 1000V/40KA AC. Order no. 1473440000 or equivalent

## Environmental Product Compliance

REACH SVHC

/

## Approvals

Approvals



ROHS

Conform

## Downloads

Approval/Certificate/Document of Conformity [EU Konformitätserklärung / EU Declaration of Conformity](#)  
[EU Konformitätserklärung / EU Declaration of Conformity](#)

Engineering Data [CAD data – STEP](#)User Documentation [Beipackzettel / Instruction sheet](#)Catalogues [Catalogues in PDF-format](#)

Brochures

Creation date July 7, 2024 6:32:27 PM CEST

## VPU II 1 1000V/40KA AC

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Drawings

## Electric symbol



Schematic circuit diagram

## VPU II 1 1000V/40KA AC

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## Crosshead screwdriver Phillips



VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

## General ordering data

Type	SDIK PH1 X 80	Version
Order No.	<a href="#">2749890000</a>	Screwdriver, Blade width (B): 1 mm, 80 mm, Blade thickness (A): 1
GTIN (EAN)	4050118897098	
Qty.	1 pc(s).	

**VPU II 1 1000V/40KA AC****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Replacement parts****Spare arrester VPU II****Spare arrester Type II**

Weidmüller VPU II surge protection products protect low-voltage consumer installations and electronic devices against overvoltages that can occur as a result of atmospheric discharges (thunderstorms) or switching operations (transients). The VPU II series meets the Type II and Type III requirements acc. to IEC 61643-11:2012 and Type 2 and Type 3 requirements acc. to EN 61643-11:2012. The spare arresters are coded and can only be inserted into suitable bases.

**General ordering data**

Type	VPU II 0 1000V/40KA AC	Version
Order No.	<a href="#">1549700000</a>	Surge voltage arrester, Low voltage, Accessories, Spare arrester
GTIN (EAN)	4050118356182	
Qty.	1 pc(s).	