

**IE-BS-M12X-S-FH****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

M12 X-type Cat 6 A field-assembled connectors and PCB sockets

**General ordering data**

Version	Plug-in connector, M12, IDC, Cat.6A / Class EA (ISO/IEC 11801 2010), IP67 plugged
Order No.	<a href="#">1516340000</a>
Type	IE-BS-M12X-S-FH
GTIN (EAN)	4050118323795
Qty.	1 pc(s).

**IE-BS-M12X-S-FH****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Wall thickness, min.	0.9 mm	Wall thickness, max.	4 mm
Net weight	28 g		

**Temperatures**

Operating temperature	-40 °C...85 °C
-----------------------	----------------

**Technical data customisable plug-in connectors**

Category	Cat.6A / Class EA (ISO/IEC 11801 2010)	Coding	X-coded
Contact material	CuZn	Contact surface	Gold-plated
Housing main material	Zinc diecast	Insulation strength	100 MΩ
Number of poles	8	Plugging cycles	≥ 100
Protection degree	IP67 plugged	Rated voltage	48 V

**General Info**

Number of poles	8	Connection 1	M12
Connection 2	IDC	Housing main material	Zinc diecast
Insulation cross-section, max.	1.6 mm	Category	Cat.6A / Class EA (ISO/IEC 11801 2010)
Connection thread	M12	Contact material	CuZn
Contact surface	Gold-plated	Connection diameter, solid	0.4...0.64 mm
Wire connection diameter, solid, min.	0.4 mm	Conductor connection cross-section, solid (AWG)	AWG 24...AWG 22
Wire connection diameter, solid, max.	0.64 mm	Connection diameter, flexible	0.48...0.76 mm
Wire cross-section, solid, min. (AWG)	AWG 24	Conductor connection cross-section, flexible (AWG)	AWG 26...AWG 22
Wire cross-section, solid, max. (AWG)	AWG 22	Wire connection diameter, flexible, min.	0.48 mm
Wire connection diameter, flexible, max.	0.76 mm	Wire cross-section, finely stranded, min. (AWG)	AWG 26
Wire cross-section, finely stranded, max. (AWG)	AWG 22	Sheath diameter, min.	5 mm
Sheath diameter, max.	9.7 mm	Contact holder materials	PA
Shielding	360° all-round enclosure	Protection degree	IP67 plugged
Plugging cycles	≥ 100		

**Electrical properties**

Insulation strength	100 MΩ	PoE / PoE+	conforming to IEEE 802.3at
Rated voltage	48 V		

**General standards**

Certificate no. (cULus)	E316369	Connector standard	IEC 61076-2-109
-------------------------	---------	--------------------	-----------------

**Standards**

Connector standard	IEC 61076-2-109
--------------------	-----------------

**IE-BS-M12X-S-FH****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Classifications**

ETIM 6.0	EC002635	ETIM 7.0	EC002635
ETIM 8.0	EC002635	ETIM 9.0	EC002635
ECLASS 9.0	27-44-01-02	ECLASS 9.1	27-44-01-03
ECLASS 10.0	27-44-01-02	ECLASS 11.0	27-44-01-02
ECLASS 12.0	27-44-01-16	ECLASS 13.0	27-44-01-02

**Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1
SCIP	67cf1078-beca-4687-860b-dc475a6ec24a

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E316369

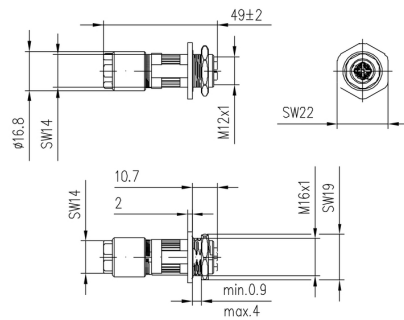
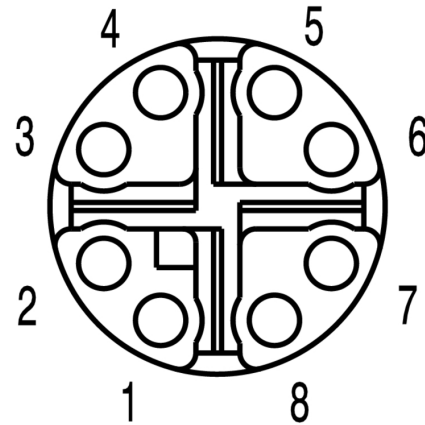
**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">DUXR.E316369</a> <a href="#">CC Link IE Field M12-X</a> <a href="#">PROFINET Manufacturer's Declaration</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">MAN IE GUIDE DE</a> <a href="#">MAN IE GUIDE EN</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	<a href="#">MB FREECONTACT EN</a> <a href="#">FL FIELDWIRING EN</a> <a href="#">PI PROFINET CABLING EN</a> <a href="#">PI PROFINET CABLING EN</a>


**IE-BS-M12X-S-FH**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**
**Dimensioned drawing**

**Pole scheme**

**Installation cut-out**

$t = \text{min. } 0.9 / \text{max. } 4$



## IE-BS-M12X-S-FH

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Screwty® cable gland tool



## The ideal tool for any application

Screwty® is the ideal, all-purpose tool for tightening all common sensor and actuator cables. Even difficult-to-reach round plugs are accessible using the Screwty®. A simple turning movement tightens and loosens the connectors without the need for excessive force. The Screwty® is a unique and global solution since it fits with most cables and plugs from other vendors (over 90 %). The Screwty® consists of a handle with a conventional 1/4" adapter. Thus it can be used for all sizes: for M12 and M8 round plug-in connectors, and for M12F and M8F customisable plugs and sockets, as well as for all M23 plugs and sockets.

## General ordering data

Type	SCREWTY- M12 F	Version	Packaging
Order No.	<a href="#">1900020000</a>	Cable gland tool for M12 connectors	Cardboard box
GTIN (EAN)	4032248375851		
Qty.	1 pc(s).		
Type	SCREWTY SET	Version	Packaging
Order No.	<a href="#">1910000000</a>	Cable gland tool for M8, M12 lines and connectors	Cardboard box
GTIN (EAN)	4032248436842		
Qty.	1 pc(s).		

## Screwty® cable gland tool with torque function



## The ideal tool for any application

Screwty® is the ideal, all-purpose tool for tightening all common sensor and actuator cables. Even difficult-to-reach round plugs are accessible using the Screwty®. A simple turning movement tightens and loosens the connectors without the need for excessive force. The Screwty® is a unique and global solution since it fits with most cables and plugs from other vendors (over 90 %). The Screwty® consists of a handle with a conventional 1/4" adapter. Thus it can be used for all sizes: for M12 and M8 round plug-in connectors, and for M12F and M8F customisable plugs and sockets, as well as for all M23 plugs and sockets.

## General ordering data

Type	SCREWTY-M12 F-DM	Version	Packaging
Order No.	<a href="#">1900021000</a>	Cable gland tool for M12 connectors	Cardboard box
GTIN (EAN)	4032248436828		
Qty.	1 pc(s).		
Type	SCREWTY SET -DM	Version	Packaging
Order No.	<a href="#">1920000000</a>	Cable gland tool for M8, M12 lines and connectors	Cardboard box
GTIN (EAN)	4032248436859		
Qty.	1 pc(s).		