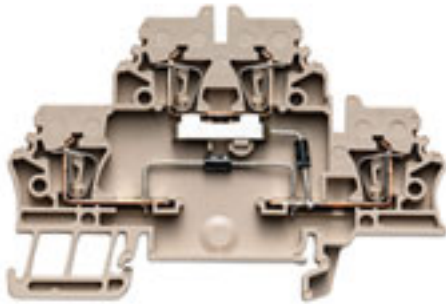


**ZDK 2.5/D/6****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Why not integrating simple electrical functions into a feed through terminal. It has the same slim design of our feed-through terminal blocks - with additional functions such as cross-connections that can be used. Often, you only need a small component to integrate an external device into your automation technology. Our modular terminal blocks with electronic components make this possible; quickly, simply, and with a perfect fit.

**General ordering data**

|            |   |
|------------|---|
| Version    | Z-series, Component terminal, Double-tier terminal, Rated cross-section: 2.5 mm <sup>2</sup> , Tension-clamp connection, dark beige |
| Order No.  | <a href="#">1690060000</a>  |
| Type       | ZDK 2.5/D/6   |
| GTIN (EAN) | 4008190877934   |
| Qty.       | 50 pc(s).   |



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 53 mm      | Depth (inches) | 2.087 inch |
| Depth including DIN rail | 54 mm      | Height         | 79.1 mm    |
| Height (inches)          | 3.114 inch | Width          | 5.1 mm     |
| Width (inches)           | 0.201 inch | Net weight     | 10.16 g    |

## Temperatures

|                                  |                |                                  |        |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature              | -25 °C...55 °C | Continuous operating temp., min. | -50 °C |
| Continuous operating temp., max. | 120 °C         |                                  |        |

## Material data

|                           |       |        |            |
|---------------------------|-------|--------|------------|
| Material                  | Wemid | Colour | dark beige |
| UL 94 flammability rating | V-0   |        |            |

## System specifications

|                                     |  |                               |     |
|-------------------------------------|--|-------------------------------|-----|
| Version                             | Tension-clamp connection, for plug-in cross-connector, One end without connector, with diode | End cover plate required      | Yes |
| Number of potentials                | 1  | Number of levels              | 2   |
| Number of clamping points per level | 2  | Number of potentials per tier | 1   |
| Levels cross-connected internally   | Yes  | PE connection                 | No  |
| Rail                                | TS 35  | N-function                    | No  |
| PE function                         | No   | PEN function                  | No  |

## Additional technical data

|                      |       |                          |         |
|----------------------|-------|--------------------------|---------|
| Electronic component | Diode | Explosion-tested version | Yes     |
| Open sides           | right | Type of mounting         | Snap-on |

## CSA rating data

|  |                 |  |        |
|--|-----------------|--|--------|
| Certificate No. (CSA)                    | 80053378-200039 | Conductor size Factory wiring max. (CSA) | 12 AWG |
| Conductor size Factory wiring min. (CSA) | 26 AWG          | Conductor size Field wiring max. (CSA)   | 12 AWG |
| Conductor size Field wiring min. (CSA)   | 26 AWG          |  |        |

## Component

|                 |                 |         |
|-----------------|-----------------|---------|
| Component diode | Type diode      | 1N4007  |
|                 | Forward current | 1 A     |
|                 | Reverse voltage | 1,300 V |
|                 | Forward voltage | 0.7 V   |

## Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. 2.5 mm<sup>2</sup>

## Conductors for clamping (rated connection)

|            |              |
|------------|--------------|
| Blade size | 0.6 x 3.5 mm |
|------------|--------------|

Creation date July 5, 2024 2:05:46 AM CEST

Catalogue status 29.06.2024 / We reserve the right to make technical changes.



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|   |  |         |                      |
|---|--|---------|----------------------|
| Clamping range, max.  | 2.5 mm <sup>2</sup>                    |         |                      |
| Clamping range, min.  | 0.05 mm <sup>2</sup>                   |         |                      |
| Connection direction  | top                                    |         |                      |
| Gauge to IEC 60947-1  | A2                                     |         |                      |
| Number of connections   | 4                                      |         |                      |
| Stripping length  | 10 mm                                  |         |                      |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4                        | Tube length                            | max.    | 10 mm                |
|   |  | min.    | 6 mm                 |
|   | Cross-section for conductor connection | nominal | 0.5 mm <sup>2</sup>  |
|   | Tube length                            | max.    | 12 mm                |
|   |  | min.    | 6 mm                 |
|   | Cross-section for conductor connection | nominal | 0.75 mm <sup>2</sup> |
|   | Tube length                            | max.    | 12 mm                |
|   |  | min.    | 6 mm                 |
|   | Cross-section for conductor connection | nominal | 1 mm <sup>2</sup>    |
|   | Tube length                            | max.    | 12 mm                |
|   |  | min.    | 8 mm                 |
|   | Cross-section for conductor connection | nominal | 1.5 mm <sup>2</sup>  |
| Tube length for wire-end ferrule without plastic collar DIN 46228/1                     | Tube length                            | max.    | 12 mm                |
|   |  | min.    | 8 mm                 |
|   | Cross-section for conductor connection | nominal | 1.5 mm <sup>2</sup>  |
|   | Tube length                            | max.    | 12 mm                |
|   |  | min.    | 8 mm                 |
|   | Cross-section for conductor connection | nominal | 2.5 mm <sup>2</sup>  |
|   | Tube length                            | max.    | 12 mm                |
|   |  | min.    | 10 mm                |
|   | Cross-section for conductor connection | nominal | 2.5 mm <sup>2</sup>  |
|   | Tube length                            | max.    | 12 mm                |
|   |  | min.    | 10 mm                |
|   | Cross-section for conductor connection | nominal | 2.5 mm <sup>2</sup>  |
| Twin wire-end ferrules, max.  | 0.34 mm <sup>2</sup>                   |         |                      |
| Twin wire-end ferrules, min.  | 0.14 mm <sup>2</sup>                   |         |                      |
| Type of connection  | Tension-clamp connection               |         |                      |
| Type of connection 2  | Tension-clamp connection               |         |                      |
| Wire connection cross section AWG, min.   | AWG 30                                 |         |                      |
| Wire connection cross section, finely stranded, max.                                    | 2.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 1.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 1.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, max.   | 2.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, min.   | 0.5 mm <sup>2</sup>                    |         |                      |



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions

|              |       |
|--------------|-------|
| TS 35 offset | 50 mm |
|--------------|-------|

## General

|   |        |           |               |
|---|--------|-----------|---------------|
| Rail                                    | TS 35  | Standards | IEC 60947-7-1 |
| Wire connection cross section AWG, min. | AWG 30 |           |               |

## Rating data

|  |                     |                                 |               |
|--|---------------------|---------------------------------|---------------|
| Rated cross-section                          | 2.5 mm <sup>2</sup> | Rated voltage                   | 500 V         |
| Rated DC voltage                             | 500 V               | Rated current                   | 0.5 A         |
| Current at maximum wires                     | 0.5 A               | Standards                       | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1.33 mΩ             | Rated impulse withstand voltage | 6 kV          |
| Power loss in accordance with IEC 60947-7-x  | 0.77 W              | Pollution severity              | 3             |

## UL rating data

|   |        |   |        |
|---|--------|---|--------|
| Certificate No. (UR)                    | E60693 | Conductor size Factory wiring max. (UR) | 14 AWG |
| Conductor size Factory wiring min. (UR) | 26 AWG | Conductor size Field wiring max. (UR)   | 14 AWG |
| Conductor size Field wiring min. (UR)   | 26 AWG | Current size C (UR)                     | 15 A   |
| Voltage size C (UR)                     | 300 V  |   |        |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000903    | ETIM 7.0    | EC000903    |
| ETIM 8.0    | EC000903    | ETIM 9.0    | EC000903    |
| ECLASS 9.0  | 27-14-11-27 | ECLASS 9.1  | 27-14-11-47 |
| ECLASS 10.0 | 27-14-11-27 | ECLASS 11.0 | 27-14-11-27 |
| ECLASS 12.0 | 27-14-11-27 | ECLASS 13.0 | 27-25-01-14 |

## Environmental Product Compliance

|            |                                      |
|------------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1                       |
| SCIP       | c6099607-b1cd-4fc8-8f5b-8c2defa73093 |

## Important note

|                     |   |
|---------------------|---|
| Product information | The allowed continuous operating temperature must be observed |
|---------------------|---|

## Approvals

Approvals



|                       |            |
|-----------------------|------------|
| ROHS                  | Conform    |
| UL File Number Search | UL Website |
| Certificate No. (UR)  | E60693     |



## ZDK 2.5/D/6

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of Conformity</a><br><a href="#">UKCA declaration of conformity</a><br><a href="#">Confirmation of Standards EN 45545-2_2020-10</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>   |
| User Documentation                          | <a href="#">StorageConditionsTerminalBlocks</a>   |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>  |
| Brochures                                   |   |





## ZDK 2.5/D/6

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

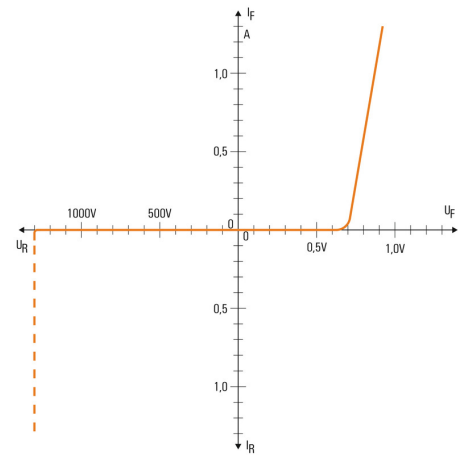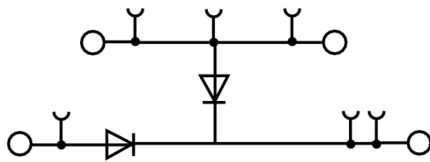



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Z-Series



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

## General ordering data

|            |                            |                                 |
|------------|----------------------------|---------------------------------|
| Type       | ZTA 4                      | Version                         |
| Order No.  | <a href="#">1688110000</a> | Accessories, Test adapter, 11 A |
| GTIN (EAN) | 4008190855666              |                                 |
| Qty.       | 25 pc(s).                  |                                 |

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | WS 10/15 MC NE WS          | Version   |
| Order No.  | <a href="#">1854090000</a> | WS, Terminal marker, 10 x 15 mm, Pitch in mm (P): 15.00 |
| GTIN (EAN) | 4032248390694              | Weidmueller, Allen-Bradley, white                       |
| Qty.       | 240 pc(s).                 |   |



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



ZS markers - in proven MultiCard-format - have been developed specifically for the Z-series. They have a large printing area. The hinged mechanism even allows access to cross-connectors without dismantling. Quick installation is guaranteed by the fact that the single tags are clipped on in strips. The single tags are easy to separate.

- Hinged marker area
- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | ZS 10/5 MC NE WS           | Version  |
| Order No.  | <a href="#">1610000000</a> | ZS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, |
| GTIN (EAN) | 4008190263171              | Allen-Bradley, white   |
| Qty.       | 480 pc(s).                 |  |

## STR transparent strips



## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | STR 7 F.SCHT 7             | Version  |
| Order No.  | <a href="#">0515300000</a> | Terminal markers, Protective cap, 27 x 6.3 mm, Transparent |
| GTIN (EAN) | 4008190182175              |  |
| Qty.       | 20 pc(s).                  |  |



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/5 MC SDR             | Version   |
| Order No.  | <a href="#">1609810000</a> | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4008190456597              | Weidmueller, To customer specification                    |
| Qty.       | 200 pc(s).                 |   |

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/5 MC NE WS           | Version   |
| Order No.  | <a href="#">1609801044</a> | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4008190397111              | Weidmueller, white  |
| Qty.       | 1,000 pc(s).               |   |



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

2.5 mm<sup>2</sup>


2.5  
mm<sup>2</sup>

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | ZQV 2.5/3                  | Version   |
| Order No.  | <a href="#">1608870000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190061630              |   |
| Qty.       | 60 pc(s).                  |   |
| Type       | ZQV 2.5/2                  | Version   |
| Order No.  | <a href="#">1608860000</a> | Z-series, Cross-connector, 24 A                                   |
| GTIN (EAN) | 4008190123680              |   |
| Qty.       | 60 pc(s).                  |   |
| Type       | ZQV 2.5/9                  | Version   |
| Order No.  | <a href="#">1608930000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190117009              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5/5                  | Version   |
| Order No.  | <a href="#">1608890000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190065713              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5/50                 | Version   |
| Order No.  | <a href="#">1697540000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190883256              |   |
| Qty.       | 10 pc(s).                  |   |
| Type       | ZQV 2.5/6                  | Version   |
| Order No.  | <a href="#">1608900000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190149840              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5/4                  | Version   |
| Order No.  | <a href="#">1608880000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190082208              |   |
| Qty.       | 60 pc(s).                  |   |
| Type       | ZQV 2.5/8                  | Version   |
| Order No.  | <a href="#">1608920000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190061531              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5/20                 | Version   |
| Order No.  | <a href="#">1908960000</a> | Z-series, Cross-connector, For the terminals, Number of poles: 20 |
| GTIN (EAN) | 4032248535293              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5/10                 | Version   |
| Order No.  | <a href="#">1608940000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190099060              |   |
| Qty.       | 20 pc(s).                  |   |

Creation date July 5, 2024 2:05:46 AM CEST



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                    |
|------------|----------------------------|------------------------------------|
| Type       | ZQV 2.5/7                  | Version                            |
| Order No.  | <a href="#">1608910000</a> | Accessories, Cross-connector, 24 A |
| GTIN (EAN) | 4008190159665              |                                    |
| Qty.       | 20 pc(s).                  |                                    |

## W-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | WEW 35/2                   | Version  |
| Order No.  | <a href="#">1061200000</a> | End bracket, Wemid, dark beige, Rail: TS 35, when screwed in |
| GTIN (EAN) | 4008190030230              |  |
| Qty.       | 50 pc(s).                  |  |

|            |                            |  |
|------------|----------------------------|--|
| Type       | WEW 35/1                   | Version  |
| Order No.  | <a href="#">1059000000</a> | End bracket, Wemid, dark beige, Rail: TS 35, when screwed in |
| GTIN (EAN) | 4008190172282              |  |
| Qty.       | 50 pc(s).                  |  |

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | WS 10/5 M MC NE WS         | Version  |
| Order No.  | <a href="#">1792000000</a> | WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, |
| GTIN (EAN) | 4032248223862              | Allen-Bradley, white   |
| Qty.       | 720 pc(s).                 |  |



**ZDK 2.5/D/6****Weidmüller Interface GmbH & Co. KG**


Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories**


|            |                            |  |
|------------|----------------------------|--|
| Type       | WS 10/5 MC NE WS           | Version  |
| Order No.  | <a href="#">1635000000</a> | WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, |
| GTIN (EAN) | 4008190261948              | Allen-Bradley, white   |
| Qty.       | 720 pc(s).                 |  |

**Slotted screwdriver**

VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

**General ordering data**

|            |                            |   |
|------------|----------------------------|---|
| Type       | SDIS SLIM 0.6X3.5X100      | Version   |
| Order No.  | <a href="#">2749610000</a> | Mounting tool, Blade width (B): 3.5 mm, Blade length: 100 mm, Blade |
| GTIN (EAN) | 4050118896350              | thickness (A): 0.6 mm   |
| Qty.       | 1 pc(s).                   |   |

**SAK-Series**

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

**General ordering data**

|            |                            |   |
|------------|----------------------------|---|
| Type       | EW 35/SCHA/M3              | Version   |
| Order No.  | <a href="#">0258660000</a> | End bracket, Wemid, beige, Rail: TS 35, when screwed in |
| GTIN (EAN) | 4008190033477              |   |
| Qty.       | 20 pc(s).                  |   |
| Type       | EW 35                      | Version   |
| Order No.  | <a href="#">0383560000</a> | End bracket, Wemid, beige, Rail: TS 35, when screwed in |
| GTIN (EAN) | 4008190181314              |   |
| Qty.       | 50 pc(s).                  |   |
| Type       | EW 35 GR 7032              | Version   |
| Order No.  | <a href="#">0383530000</a> | End bracket, Wemid, grey, Rail: TS 35, when screwed in  |
| GTIN (EAN) | 4008190027322              |   |
| Qty.       | 50 pc(s).                  |   |



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## ZGB pivotable group tag holder




The ZGB 15 is a hinged group tag carrier. The tag carrier can hold the dekafix 5, WS 12/5 terminal markers or the inlay tag ESO 15.

The ZGB 30 is a hinged group tag carrier. The tag carrier can hold the dekafix 5, WS 12/5 terminal markers or the inlay tag ESO 7.

Inlay tags and protective strips can be found under "Accessories".

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | ZGB 30/3.5                 | Version   |
| Order No.  | <a href="#">1778290000</a> | Terminal markers, Terminal marker, 32 x 7 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4032248161065              | white   |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZGB 30                     | Version   |
| Order No.  | <a href="#">1611930000</a> | Terminal markers, Terminal marker, 32 x 7 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4008190002251              | Weidmueller, white  |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZGB 15                     | Version   |
| Order No.  | <a href="#">1636530000</a> | Terminal markers, Terminal marker, 15 x 7 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4008190297053              | Weidmueller, white  |
| Qty.       | 20 pc(s).                  |   |

2.5 mm<sup>2</sup>

End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

## General ordering data

|            |                            |                                      |
|------------|----------------------------|--------------------------------------|
| Type       | ZAP/TW ZDK2.5              | Version                              |
| Order No.  | <a href="#">1674730000</a> | Z-series, End plate, Partition plate |
| GTIN (EAN) | 4008190444891              |                                      |
| Qty.       | 20 pc(s).                  |                                      |
| Type       | ZAP/TW ZDK2.5 OR           | Version                              |
| Order No.  | <a href="#">1690080000</a> | Z-series, End plate, Partition plate |
| GTIN (EAN) | 4008190870645              |                                      |
| Qty.       | 20 pc(s).                  |                                      |
| Type       | ZAP/TW ZDK2.5 BL           | Version                              |
| Order No.  | <a href="#">1748800000</a> | Z-series, End plate, Partition plate |
| GTIN (EAN) | 4008190997519              |                                      |
| Qty.       | 20 pc(s).                  |                                      |



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Z-Series



The use of reducing sleeves simplifies the connection of conductors with smaller cross-sections. Conductors can be reliably inserted into the clamping point without the strands fraying. The use of a reducing sleeve centres the conductor in the entry point.

## General ordering data

|            |                            |                           |
|------------|----------------------------|---------------------------|
| Type       | ZRH 1.5H/1                 | Version                   |
| Order No.  | <a href="#">1678810000</a> | Z-series, Reducing sleeve |
| GTIN (EAN) | 4008190487324              |                           |
| Qty.       | 1,000 pc(s).               |                           |
| Type       | ZRH 1.5H/2                 | Version                   |
| Order No.  | <a href="#">1678800000</a> | Z-series, Reducing sleeve |
| GTIN (EAN) | 4008190487317              |                           |
| Qty.       | 1,000 pc(s).               |                           |

## Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## General ordering data

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | BZT 1 WS 10/5              | Version                    |
| Order No.  | <a href="#">1805490000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231              |                            |
| Qty.       | 100 pc(s).                 |                            |
| Type       | BZT 1 ZA WS 10/5           | Version                    |
| Order No.  | <a href="#">1805520000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248              |                            |
| Qty.       | 100 pc(s).                 |                            |



## ZDK 2.5/D/6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## Z-Series

Z  
Series

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | ZEW 35                     | Version  |
| Order No.  | <a href="#">9540000000</a> | End bracket, Wemid, dark beige, Rail: TS 35, Snap-on |
| GTIN (EAN) | 4008190956264              |  |
| Qty.       | 20 pc(s).                  |  |
| Type       | ZEW 35/2                   | Version  |
| Order No.  | <a href="#">8630740000</a> | End bracket, Wemid, dark beige, Rail: TS 35, Snap-on |
| GTIN (EAN) | 4032248348916              |  |
| Qty.       | 20 pc(s).                  |  |