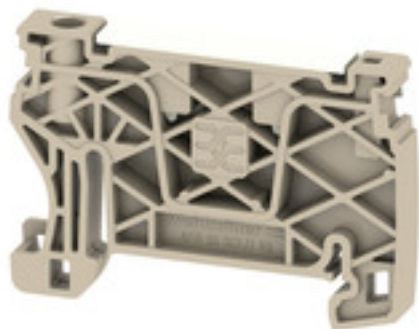


AEB 35 SCL/1 V0 DL**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****General ordering data**

| | |
|------------|----------------------------|
| | |
| Version | A-series, End bracket |
| Order No. | 2570240000 |
| Type | AEB 35 SCL/1 V0 DL |
| GTIN (EAN) | 4050118580259 |
| Qty. | 50 pc(s). |

AEB 35 SCL/1 V0 DL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|--------------------------|------------|----------------|------------|
| Depth | 36.5 mm | Depth (inches) | 1.437 inch |
| Depth including DIN rail | 37 mm | Height | 52.6 mm |
| Height (inches) | 2.071 inch | Width | 6 mm |
| Width (inches) | 0.236 inch | Net weight | 6.92 g |

Temperatures

| | |
|---------------------|----------------|
| Storage temperature | -25 °C...55 °C |
|---------------------|----------------|

Material data

| | | | |
|---------------------------|-------|--------|------------|
| Material | Wemid | Colour | dark beige |
| UL 94 flammability rating | V-0 | | |

System specifications

| | |
|------|-------|
| Rail | TS 35 |
|------|-------|

Additional technical data

| | | | |
|-----------|-----------|------------------|---------|
| Interlock | screwless | Type of mounting | Snap-on |
|-----------|-----------|------------------|---------|

General

| | |
|------|-------|
| Rail | TS 35 |
|------|-------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001041 | ETIM 7.0 | EC001041 |
| ETIM 8.0 | EC001041 | ETIM 9.0 | EC001041 |
| ECLASS 9.0 | 27-14-11-35 | ECLASS 9.1 | 27-14-11-35 |
| ECLASS 10.0 | 27-14-11-35 | ECLASS 11.0 | 27-14-11-35 |
| ECLASS 12.0 | 27-14-11-35 | ECLASS 13.0 | 27-25-03-02 |
| ECLASS 14.0 | 27-25-03-02 | | |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| REACH SVHC | / |
| RoHS Compliance Status | Compliant without exemption |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads


| | |
|---|--|
| Approval/Certificate/Document of Conformity | Confirmation of Standards EN 45545-2_2020-10 |
| Engineering Data | CAD data – STEP |
| Catalogues | Catalogues in PDF-format |

AEB 35 SCL/1 V0 DL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

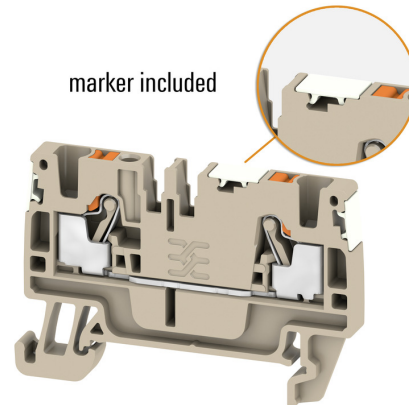


AEB 35 SCL/1 V0 DL**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Slotted screwdriver**

VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | SDIS SLIM 0.6X3.5X100 | Version |
| Order No. | 2749610000 | Mounting tool, Blade width (B): 3.5 mm, Blade length: 100 mm, Blade |
| GTIN (EAN) | 4050118896350 | thickness (A): 0.6 mm |
| Qty. | 1 pc(s). | |