


SAI-08Z-VPPP-4A-M08L-PNP**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The new M8 hood distribution boxes are extremely compact and feature a comfortable PUSH IN connection. This allows a quick, safe and efficient cabling in the field.

A modular system is available for our hood distributors.

Individual markers offer the possibility of individual labeling of the distributor and the I/O sockets.

- 3- and 4-pole M8 I/O sockets
- 4, 6, 8 or 10 I/O sockets
- Protection class IP 67
- UL approval

General ordering data

| | |
|------------|---|
| Version | Sensor-actuator passive distributor, M8, LED: Yes, Number of poles: 4, Number of contact sockets: 8 |
| Order No. | 2818990000 |
| Type | SAI-08Z-VPPP-4A-M08L-PNP |
| GTIN (EAN) | 4064675330219 |
| Qty. | 1 pc(s). |

SAI-08Z-VP-4A-M08L-PNP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | |
|------------|------|
| Net weight | 10 g |
|------------|------|

Temperatures

| | |
|-----------------------|------------|
| Operating temperature | -25 - 80°C |
|-----------------------|------------|

Connection data

| | | | |
|----------------------|---------------------|----------------------|----------------------|
| Cable glands | M 20 | Clamping range, min. | 0.08 mm ² |
| Clamping range, max. | 1.5 mm ² | Distributor outlet | Hood distributor |
| Type of connection | PUSH IN | | |

Electrical data

| | | | |
|---|------|--------------------------------|------|
| Rated voltage, min. | 15 V | Rated voltage, max. | 30 V |
| Max. current-carrying capacity per slot | 4 A | Total current | 6 A |
| Current per signal | 2 A | Electrical isolation available | No |

General technical data

| | | | |
|-------------------------------------|-------|-----------------------------|--------|
| Protection degree | IP67 | Number of poles | 4 |
| Number of contact sockets | 8 | Connection thread | M8 |
| Pollution severity | 3 | Fire behaviour | V-0 |
| LED | Yes | LED initiator | Yes |
| LED colour for indicating operation | green | LED colour for I/O function | yellow |

Material data

| | | | |
|--------------------------|----------------|-----------------------|-----------------------------|
| Material O-Ring | FKM | Housing main material | PBT |
| Material of distributor | Plastic | Housing colour | black (similar to RAL 9005) |
| Hood sealing material | FKM | Screw socket | Nickel-plated CuZn |
| Contact material | CuZn | Contact surface | Gold-plated |
| Contact carrier material | PBT (UL 94 V0) | | |

Technical data cable

| | | | |
|-----------------|---|-----------------------------|----|
| Number of poles | 4 | Suitable for cable carriers | No |
|-----------------|---|-----------------------------|----|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC002585 | ETIM 7.0 | EC003558 |
| ETIM 8.0 | EC003558 | ETIM 9.0 | EC003558 |
| ECLASS 9.0 | 27-44-01-08 | ECLASS 9.1 | 27-44-01-08 |
| ECLASS 10.0 | 27-44-01-11 | ECLASS 11.0 | 27-44-01-11 |
| ECLASS 12.0 | 27-44-01-11 | ECLASS 13.0 | 27-44-01-11 |

Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | / |
|------------|---|

SAI-08Z-VPPP-4A-M08L-PNP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



UL File Number Search

UL Website

Certificate no. (cULus)

E141197

Downloads

Engineering Data

[CAD data – STEP](#)

Catalogues

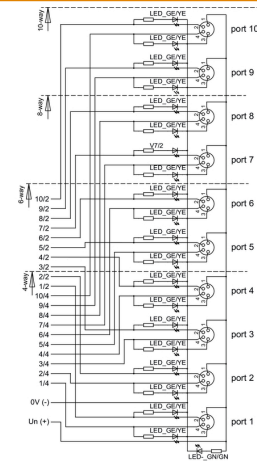
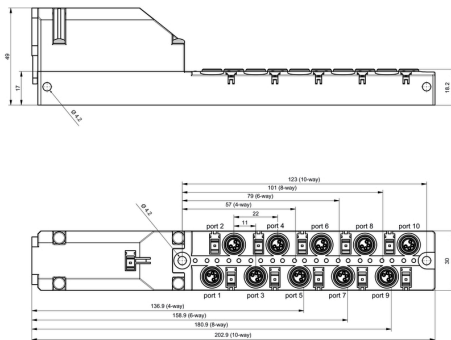

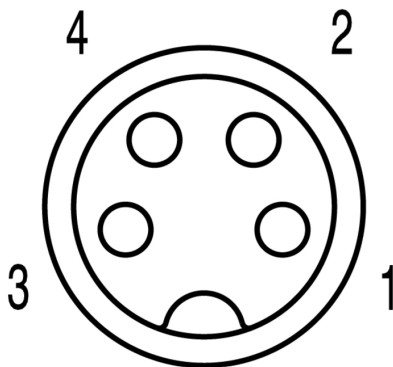
[Catalogues in PDF-format](#)

SAI-08Z-VPPP-4A-M08L-PNP

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Drawing

Pole scheme


SAI-08Z-VPPP-4A-M08L-PNP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Screwty® cable gland tool with torque function



The ideal tool for any application

Screwty® is the ideal, all-purpose tool for tightening all common sensor and actuator cables. Even difficult-to-reach round plugs are accessible using the Screwty®. A simple turning movement tightens and loosens the connectors without the need for excessive force. The Screwty® is a unique and global solution since it fits with most cables and plugs from other vendors (over 90 %). The Screwty® consists of a handle with a conventional 1/4" adapter. Thus it can be used for all sizes: for M12 and M8 round plug-in connectors, and for M12F and M8F customisable plugs and sockets, as well as for all M23 plugs and sockets.

General ordering data

| Type | SCREWTY SET -DM | Version | Packaging |
|------------|----------------------------|---|-----------|
| Order No. | 1920000000 | Cable gland tool for M8, M12 lines and connectors | Cardboard |
| GTIN (EAN) | 4032248436859 | | box |
| Qty. | 1 pc(s). | | |

M8



Protective caps protect unassigned plug-in stations against external influences.

General ordering data

| Type | SAI-SK M8 | Version |
|------------|----------------------------|--|
| Order No. | 1802760000 | Protected component assemblies, Protective cap |
| GTIN (EAN) | 4032248257379 | |
| Qty. | 50 pc(s). | |

SAI-08Z-VPPP-4A-M08L-PNP**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Blank**

MultiFit is the Weidmüller marker system used for other makes of terminals. Similar to the Weidmüller Dekafix, the markers of the MultiFit family are available ready-for-use with standard printing.

We recommend to carry out a test with sample markers on the terminals used when using MultiFit for the first time.

- One marker, suitable for different makes of terminals.
- Ready-to-use markers with standard printing
- Blank markers for printing with the PrintJet CONNECT or Plotter
- Delivery of individually printed markers according to customer CAE data or specifications
- One marking system for all applications

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | MFF 10/6 MC NE WS | Version |
| Order No. | 1856780000 | MultiFit, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Festo, |
| GTIN (EAN) | 4032248400881 | white |
| Qty. | 600 pc(s). | |