


**PSSRN K 24VDC 1D K 1000VDC 15A****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Switch high DC loads up to 1000 V DC and 15 A completely wear-free, reliable and noiseless.

- Load circuit 1-phase: 24...1000 V DC / 15 A
- DC industry ready Thanks to the switching voltage of up to 1000 V DC
- Compact design with a width from 17.8 mm
- Ready to use with integrated heat sink and mounting rail base for mounting on DIN rail TS35
- Output connections ring lug suitable

**General ordering data**

Version	Power Solid-State Relais, Solid state contactor, Rated control voltage: 4.5...32 V DC , Rated switching voltage: 20.4...1000 V DC (IEC), Continuous current: 15 A
Order No.	<a href="#">2986930000</a>
Type	PSSRN K 24VDC 1D K 1000VDC 15A
GTIN (EAN)	4099986853058
Qty.	1 pc(s).

## PSSRN K 24VDC 1D K 1000VDC 15A

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	140.5 mm	Depth (inches)	5.531 inch
Height	110 mm	Height (inches)	4.331 inch
Width	17.8 mm	Width (inches)	0.701 inch
Net weight	260 g		

## Temperatures

Storage temperature	-40 °C...100 °C	Operating temperature	-40 °C...80 °C
Humidity	95% relative humidity, non-condensing @ 40°C		

## Probability of failure

MTTF	18 a
------	------

## Control side

Rated control voltage	4.5...32 V DC	Nominal control current	8.5 mA...13.5 mA
Status indicator	Green LED		

## Load side

Rated switching voltage	20.4...1000 V DC (IEC)	Continuous current	15 A (DC1) @ 40 °C; 5 A (DC 3)
Max. switching current	15 A	Load category	DC1, DC 3, DC 5
Pulse load, max. current	200 A (10 µs, non-recurrent)	Switch-on delay	0.1 ms
Switch-off delay	250 µs	Voltage drop at max. load	≤ 1.6 V
Leakage current	<1.5 mA	Min. switching current	20 mA
Short-circuit-proof	No	Protective circuit, load side	Integrated free-wheel diode
Contact type	1 NO contacts (IGBT)	max. switching frequency (DC control voltage)	20 Hz

## General data

Version	Single-phase with mounted heat sink (DC output)	Rail	TS 35
Colour	black		

## Insulation coordination

Pollution severity	2	Surge voltage category	III
Dielectric strength for control side - load side	4 kV <sub>eff</sub>	Dielectric strength of load side - housing	4 kV <sub>eff</sub>
Impulse withstand voltage	6 kV (1.2/50 µs)	Protection degree	IP20

## Further details of approvals / standards

Certificate no. (cULus)	E537615
-------------------------	---------

**PSSRN K 24VDC 1D K 1000VDC 15A****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Connection data (control side)**

Wire connection method (control side)	Screw connection	Min. rated connection clamping range (control side)	0.75 mm <sup>2</sup>
Max. rated connection clamping range (control side)	2.5 mm <sup>2</sup>	Wire connection method (control side)	M3 screw with captivated washer
Min. tightening torque (control side)	0.5 Nm	Max. tightening torque (control side)	0.6 Nm
Blade size (control side)	PZ 1		

**Connection data (load side)**

Wire connection method (load side)	Screw connection	Min. rated connection clamping range (load side)	2.5 mm <sup>2</sup>
Max. rated connection clamping range (load side)	6 mm <sup>2</sup>	Wire connection method (load side)	M4 screw with captivated washer
Min. tightening torque (load side)	1.5 Nm	Max. tightening torque (load side)	2 Nm
Blade size (load side)	Gr. PZ2		

**Classifications**

ETIM 6.0	EC002055	ETIM 7.0	EC002055
ETIM 8.0	EC002055	ETIM 9.0	EC002055
ECLASS 9.0	27-37-10-14	ECLASS 9.1	27-37-10-14
ECLASS 10.0	27-37-10-14	ECLASS 11.0	27-37-10-14
ECLASS 12.0	27-37-10-14	ECLASS 13.0	27-37-10-14

**Environmental Product Compliance**

REACH SVHC

/

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E537615

**Downloads**

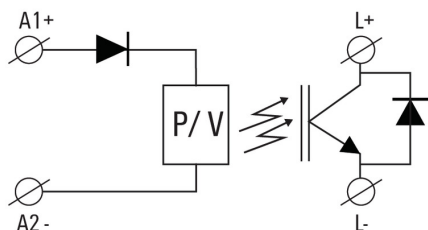
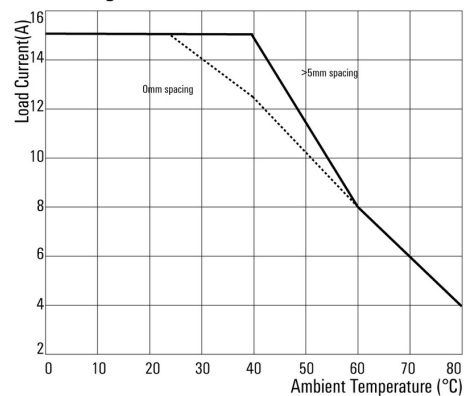
Approval/Certificate/Document of Conformity	<a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
User Documentation	<a href="#">Beipackzettel / Package Insert – multilingual</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

**PSSRN K 24VDC 1D K 1000VDC 15A**
**Weidmüller Interface GmbH & Co. KG**

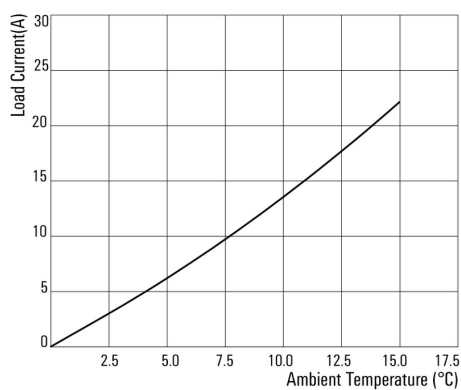
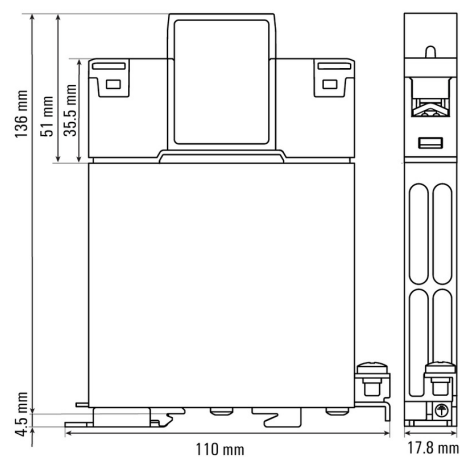
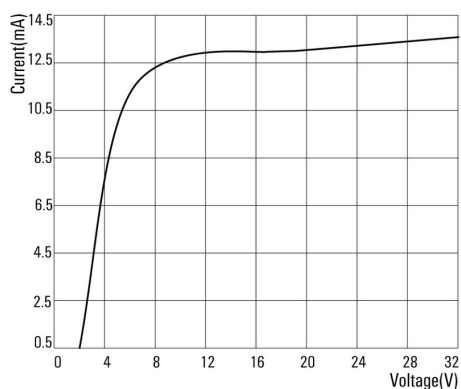
Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Drawings**
**Wiring diagram**

**Graph**
**Derating Curve**


Derating curve

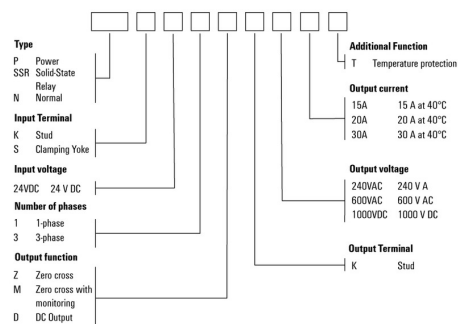
**Graph**
**Output power dissipation Curve**

**Dimensional drawing**

**Graph**
**Control current Curve**


**PSSRN K 24VDC 1D K 1000VDC 15A**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Drawings**
**Miscellaneous**
**Power Solid-State Relay (PSSR)**

**Type codes**
**Miscellaneous**

**Suggested mounting distances to ensure optimal heat dissipation**

