

WBC-P-8BK-70**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Battery storage systems are playing an increasingly important role in the field of renewable energies. They usually consist of several individual batteries that need to be quick and easy to replace. The Weidmüller Battery Connector (WBC) makes it possible to connect several individual batteries to an ESS in just a few simple steps – and to disconnect the connections just as quickly if required. For more safety and easy handling, the poles are clearly marked: The positive pole in orange and the negative pole in black.

General ordering data

Order No.	2995040000
Type	WBC-P-8BK-70
GTIN (EAN)	4099986882218
Qty.	5 pc(s).

WBC-P-8BK-70**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Dimensions and weights**

Net weight	45.3 g
------------	--------

Temperatures

Continuous operating temp., min.	-40 °C	Continuous operating temp., max.	125 °C
Limit temperature	-40 °C ... 125 °C	Humidity	≤85% RH

General Data

Approvals	UL 4128	Colour	black
Conductor cross-section, max.	70 mm ²	Contact diameter, male Ø	8 mm
Material	PA 66	Outer cable diameter, max.	15.4 mm
Outer cable diameter, min.	14.7 mm	Surface finish	silver
Type	Female	Type of connection	Crimp connection

Technical Data

Operating altitude	≤ 2000 m	Plugging cycles	≥ 100
Protection degree	IP67 plugged	Rated current	250 A
Rated voltage	1,500 V	Shock resistance	V2
Surge voltage category	II	UL 94 flammability rating	V-0
Vibration resistance	30g	Volume resistance	≥ 5000 MΩ

Classifications

ETIM 7.0	EC001121	ETIM 8.0	EC001121
ETIM 9.0	EC001121	ECLASS 10.0	27-44-03-12
ECLASS 11.0	27-44-03-12	ECLASS 12.0	27-44-03-12
ECLASS 13.0	27-44-03-12	ECLASS 14.0	27-44-03-12

Environmental Product Compliance

RoHS Compliance Status	Compliant
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

Downloads


User Documentation	Montageanleitung_WBC_P_8_200A
Catalogues	Catalogues in PDF-format

WBC-P-8BK-70

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

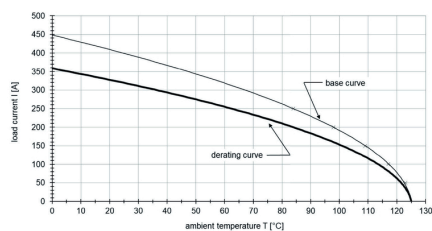

WBC-P-8BK-70

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Tools

**Crimping tools for cable lugs, connectors and wire-end ferrules with interchangeable inserts**

- extremely fast processing thanks to hydraulic support
- large processing range up to 400 mm²
- 360° revolving quick action crimping head
- automatic pressure limitation and monitoring via pressure sensor
- Additional features for APG series:
- electronic control and monitoring of the crimping process
- Saving of all crimping cycles and error messages to internal memory
- Reading of all cycles and error messages via USB

General ordering data

Type	APG 80	Version
Order No.	2853270000	6mm ² , 400mm ²
GTIN (EAN)	4064675477020	
Qty.	1 pc(s).	

... for crimp cable lugs (acc. to DIN 46234)**Crimping tools for cable lugs, connectors and wire-end ferrules with interchangeable inserts**

- extremely fast processing thanks to hydraulic support
- large processing range up to 400 mm²
- 360° revolving quick action crimping head
- automatic pressure limitation and monitoring via pressure sensor
- Additional features for APG series:
- electronic control and monitoring of the crimping process
- Saving of all crimping cycles and error messages to internal memory
- Reading of all cycles and error messages via USB

General ordering data

Type	ES APG 80 DIN 70	Version
Order No.	1502890000	70mm ² , Indent crimp
GTIN (EAN)	4050118310719	
Qty.	1 pc(s).	