

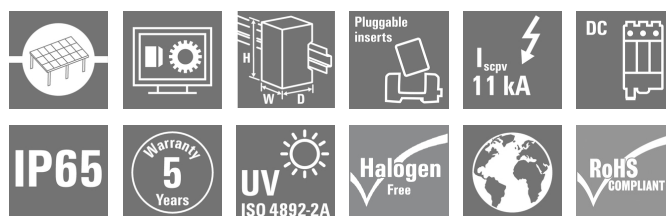
PV 212S0F3CXXV000TAPA15PWW**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Standard portfolio for combiner boxes.****Protect and monitor strings in a solar park.**

Weidmüller has developed a full portfolio of standard PV DC combiner boxes for solar parks. These products intend to cover the most common used solutions for such purposes in an efficient and competitive manner. From 6 up to 32 inputs our Generation X offers a full range of products for monitored and non-monitored combiner boxes allowing our customer to benefit from Weidmueller's experience and commitment to quality. Gen X

General ordering data

Version	Photovoltaics, Assembled enclosure, Combiner Box, 1500 V, With fuse holder, Surge protection II, Cable gland, for wall mounting, Switch disconnect, Portrait, Current monitoring, Voltage monitoring, Temperature monitoring, Central Inverter
Order No.	8000101214
Type	PV 212S0F3CXXV000TAPA15PWW
GTIN (EAN)	4099986025325
Qty.	1 pc(s).

PV 212S0F3CXXV000TAPA15PWW
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Technical data
Dimensions and weights

Depth	350 mm	Depth (inches)	13.78 inch
Height	1,056 mm	Height (inches)	41.575 inch
Width	852 mm	Width (inches)	33.543 inch
Net weight	38,247.453 g		

Temperatures

Ambient temperature	-20°C to +45 °C	Operating temperature	-20°C to +45 °C
---------------------	-----------------	-----------------------	-----------------

DC electrical properties

Earthing	Directly at the VPU	Rated voltage	1,500 V
Surge protection DC side	1500 V type II	Switching capacity	400 A (DC21B 1500 V)

DC inputs

Cartridge fuse	22 x 58 mm		
Connection DC input cable (+)	Screw connection		
Connection DC input cable (-)	Screw connection		
Connection type, DC input cable	Cable gland		
DC Input + & -	Wire connection	Type of connection	M16 Cable gland
	Cable entry	Number of cable entries	24
		Cable diameter, min.	5 mm
		Cable diameter, max.	10 mm
Functional earth connector	Cable entry	Number of cable entries	1
		Cable diameter, min.	6 mm
		Cable diameter, max.	12 mm
	Wire connection	Type of connection	M20 Cable gland
Fuse	30 A, 35 A, 40 A, 50 A, 60 A, 70 A, 75 A		
Fuse	Empty fuse holder		
Fuse type	Empty fuse holder		
Fuse-link standard	gPV (EN 60269-6)		
Fused poles of string	+/-		
Number of DC inputs	12		
Position of the fuses	positive and negative inputs		

DC outputs

DC Output + & -	Wire connection	Type of connection	M40 Cable gland
		Wire cross-section, min.	150 mm ²
		Wire cross-section, max.	400 mm ²
	M12 bolt and nut connection		
DC output cable connection	M12 bolt and nut connection		
Load circuit breaker with auxiliary contact	No		
Number of DC outputs	2		

PV 212S0F3CXXV000TAPA15PWW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

DC string monitoring

Current monitoring	Solar SMS	Monitoring function	Solar SMS, Output voltage, current, temperature
Supply	Self-powered	Temperature monitoring	Solar SMS
Voltage monitoring	Solar SMS		

Housing

Protection degree	IP65	Type of mounting	Wall mounting
-------------------	------	------------------	---------------

Norms and standards

Standards	EN 61439-2:2011, IEC 61439-2 ed 3.0
-----------	-------------------------------------

Guarantee

Time interval	5 years
---------------	---------

Electrical characteristics

Rated DC voltage	1,500 V	Switching disconnecter capacity	IEC 60947-3
------------------	---------	---------------------------------	-------------

Enclosure

Connection type string	Internal terminal (with cable gland feed-through)	Cover	Hinged door
Enclosure attachment	Fixing lugs	Impact resistance	IK10 in accordance with IEC 62262
Insulating material	Polyester glass-fibre reinforced, Polycarbonate	Switch disconnecter execution	switch inside enclosure
Type of mounting	Wall mounting		

General data

Installation location	Protected outdoor area (>1 km from sea)	Protection degree	IP65
Standards	EN 61439-2:2011, IEC 61439-2 ed 3.0		

Surge protection DC side

Short-circuit current I_{SCP}	25 A	Standards	EN 61439-2:2011, IEC 61439-2 ed 3.0
Surge protection DC side	1500 V type II		

Classifications

ETIM 6.0	EC002928	ETIM 7.0	EC002928
ETIM 8.0	EC003857	ETIM 9.0	EC003857
ECLASS 9.0	22-57-92-03	ECLASS 9.1	22-57-02-90
ECLASS 10.0	22-57-02-90	ECLASS 11.0	22-57-02-92
ECLASS 12.0	22-57-02-92	ECLASS 13.0	22-57-02-92

PV 212S0F3CXXV000TAPA15PWW

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	1d28ada4-1634-4382-8635-45f6353a6574

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	EU Declaration of Conformity Combiner Boxes monitored
Engineering Data	Electrical Drawing Thermal Report
Technical Documentation	Mechanical Drawing
User Documentation	User Manual PV DC Combiner Boxes
Catalogues	Catalogues in PDF-format

PV 212S0F3CXXV000TAPA15PWW

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings



PV 212S0F3CXXV000TAPA15PWW

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Combiner Box Name Description

PV 2 24 S0 FX CXX VX OX TXPX 15 P F ES

PV 1: PV DC L0 Industrial
PV 2: PV DC L1 Industrial
PV 3: PV DC L2 Industrial

Number of inputs (01-36)

S0: Switch-disconnector

S0 → Switch-disconnector (SW)
S1 → Switch-disconnector with remote disconnection (SW RD)
S2 → Molded Case Circuit Breaker (MCCB)
S3 → Motorized switch-disconnector (SW M)
S4 → Switch-disconnector with Contactor (SW K)
S5 → No switch-disconnector needed (N/A)

FX: Fuses / Fuseholders position

F0 → Fuses Both Poles
F1 → Only Positive Fuses
F2 → Only Negative Fuses
F3 → Only Fuse Holders
F4 → Only Fuse holder in positive (+)
F5 → Only Fuse holder in negative (-)
FX → No Fuse holders needed (N/A)

CXX: CIL Fuses Type → C 10/15/16/20/25/30/40/50/55/60/63/80 - (Example C20)

NXX: NH Fuses Type → N 40/50/63/80/100/125/160/200/250/315/355/400 - (Example N40)

CXX → N/A, NXX → N/A

VX: SPD Type

V0 → SPD Class II / V1 → SPD Class I+II / V2 → SPD Class I
VX → No SPD needed (N/A)

OX: Output type

O0 → No holder needed (N/A)
O1 → Cable Gland
O2 → M20x1.5
O3 → M24x1.5
O4 → M30x1.5

Country / Whole World

Floating: YES (F) / NO

P: Portrait

L: Landscape

10: 1000V

15: 1500V

TX: Monitoring Device

TX → No monitoring (N/A)
T0 → TC 24V (24V or 1.3kV)
T1 → TC 24V
T2 → TC 24V
T3 → TC 24V
T4 → TC 24V
T5 → TC 24V
T6 → TC 24V
T7 → TC 24V
T8 → TC 24V
T9 → TC 24V
T10 → TC 24V
T11 → TC 24V
T12 → TC 24V
T13 → TC 24V
T14 → TC 24V
T15 → TC 24V
T16 → TC 24V
T17 → TC 24V
T18 → TC 24V
T19 → TC 24V
T20 → TC 24V
T21 → TC 24V
T22 → TC 24V
T23 → TC 24V
T24 → TC 24V
T25 → TC 24V
T26 → TC 24V
T27 → TC 24V
T28 → TC 24V
T29 → TC 24V
T30 → TC 24V
T31 → TC 24V
T32 → TC 24V
T33 → TC 24V
T34 → TC 24V
T35 → TC 24V
T36 → TC 24V
T37 → TC 24V
T38 → TC 24V
T39 → TC 24V
T40 → TC 24V
T41 → TC 24V
T42 → TC 24V
T43 → TC 24V
T44 → TC 24V
T45 → TC 24V
T46 → TC 24V
T47 → TC 24V
T48 → TC 24V
T49 → TC 24V
T50 → TC 24V
T51 → TC 24V
T52 → TC 24V
T53 → TC 24V
T54 → TC 24V
T55 → TC 24V
T56 → TC 24V
T57 → TC 24V
T58 → TC 24V
T59 → TC 24V
T60 → TC 24V
T61 → TC 24V
T62 → TC 24V
T63 → TC 24V
T64 → TC 24V
T65 → TC 24V
T66 → TC 24V
T67 → TC 24V
T68 → TC 24V
T69 → TC 24V
T70 → TC 24V
T71 → TC 24V
T72 → TC 24V
T73 → TC 24V
T74 → TC 24V
T75 → TC 24V
T76 → TC 24V
T77 → TC 24V
T78 → TC 24V
T79 → TC 24V
T80 → TC 24V
T81 → TC 24V
T82 → TC 24V
T83 → TC 24V
T84 → TC 24V
T85 → TC 24V
T86 → TC 24V
T87 → TC 24V
T88 → TC 24V
T89 → TC 24V
T90 → TC 24V
T91 → TC 24V
T92 → TC 24V
T93 → TC 24V
T94 → TC 24V
T95 → TC 24V
T96 → TC 24V
T97 → TC 24V
T98 → TC 24V
T99 → TC 24V

PX: Power Supply for (TX)

PX → No Power Supply Needed (N/A)
P0 → Self-Powered (SEI)
P1 → External Power Supply (PS ACDC)
P2 → Self-Powered (SEI)
P3 → Self-Powered (SEI)
P4 → Self-Powered (SEI)
P5 → Self-Powered (SEI)
P6 → Self-Powered (SEI)
P7 → Self-Powered (SEI)
P8 → Self-Powered (SEI)
P9 → Self-Powered (SEI)

