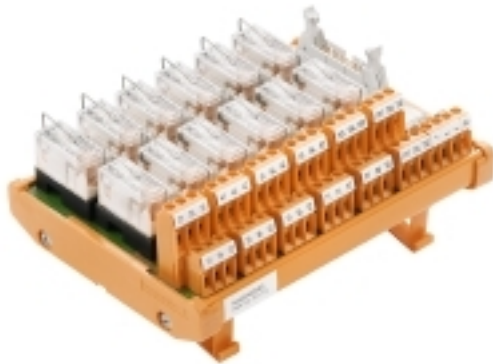


RSM-12 C 1CO S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration

Digital output interface per-relay for electrical signal transmission between the PLC and the field.

- Electrical isolation by pluggable relays.
- Integrated LED status display.
- Screw or tension clamp-connection.
- Additional functions: in-series fuse or isolator
- 2 versions available: compact (RSS relay) or standard (RCL relay).

General ordering data

| | |
|------------|---|
| Version | Interface, RSM, 12 compact, RCL, Screw connection |
| Order No. | 9445060000 |
| Type | RSM-12 C 1CO S |
| GTIN (EAN) | 4032248252671 |
| Qty. | 1 pc(s). |

RSM-12 C 1CO S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|------------|--------|-----------------|------------|
| Depth | 68 mm | Depth (inches) | 2.677 inch |
| Height | 109 mm | Height (inches) | 4.291 inch |
| Width | 147 mm | Width (inches) | 5.787 inch |
| Net weight | 482 g | | |

Temperatures

| | | | |
|---------------------|-------------|-----------------------|-------------|
| Storage temperature | -40...60 °C | Operating temperature | -25...40 °C |
|---------------------|-------------|-----------------------|-------------|

General data

| | | | |
|----------------------------------|--------|-------------------|--------|
| LED status display per relay | green | Fuse per relay | No |
| LED status of the supply voltage | yellow | Power supply fuse | 3.15 A |

Connection data

| | | | |
|-------------------------|--------------|--------------------------------|---|
| Connection (field side) | LL2N 5.08 mm | Connection on control side | Plug-in connector in acc. with IEC60603-13 / DIN41651 |
| Connection supply | LL 5.08 mm | Number of poles (control side) | 20-pole plug |

Rating data

| | |
|-------------------------|--------------------------------------|
| Mechanical service life | 3 x 10 ⁷ switching cycles |
|-------------------------|--------------------------------------|

Ratings data input

| | | | |
|---------------|---------------|---------------|-------|
| Input voltage | 24 V DC ± 10% | Input current | 20 mA |
| Power rating | 0.4 VA | | |

Ratings data output

| | | | |
|----------------------------|------------|-------------------------|------------------------|
| Relay type | RCL | Type of output | Potential-free contact |
| Contact material | AgNi 90/10 | Rated voltage | ≤ 250 Vdc ≤ 250 Vac |
| Max. AC continuous current | 5 A | AC peak current | 16 A |
| Minimum contact current | 0.01 A | Minimum contact voltage | 10 V |

Insulation coordinates (EN50178)

| | | | |
|-----------------------------------|--------------|------------------------------------|-----------|
| According to | DIN EN 50178 | Rated input insulation voltage | < 50 V AC |
| Rated output insulation voltage | < 250 V AC | Overvoltage category input/input | III |
| Overvoltage category input/output | III | Overvoltage category output/output | II |
| Pollution severity level | 2 | Pulse voltage test (1,2/50µs) | 6 kV |
| Insulation test voltage AC | 1.2 kV | Clearance input/output | ≥ 5.5 mm |
| Clearance input/input | ≥ 0.2 mm | Clearance output/output | ≥ 1.17 mm |

RSM-12 C 1CO S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Connection field

| | | | |
|----------------------------------|---------------------|------------------------------|----------------------|
| Clamping range, max. | 6 mm ² | Clamping range, min. | 0.13 mm ² |
| Flexible with sleeve, max. | 2.5 mm ² | Flexible with sleeve, min. | 0.5 mm ² |
| Flexible, max. H05(07) V-K | 4 mm ² | Flexible, min. H05(07) V-K | 0.5 mm ² |
| Max. wire cross-section, AWG | AWG 12 | Min. wire cross-section, AWG | AWG 26 |
| Sleeve with plastic collar, max. | 2.5 mm ² | Solid, max. H05(07) V-U | 6 mm ² |
| Solid, min. H05(07) V-U | 0.5 mm ² | Stripping length | 6 mm |
| Tightening torque, max. | 0.6 Nm | Tightening torque, min. | 0.5 Nm |
| Type of connection | Screw connection | | |

Supply connection

| | | | |
|------------------------------|---------------------|-----------------------------------|----------------------|
| Type of connection | Screw connection | Clamping range, min. | 0.13 mm ² |
| Clamping range, max. | 6 mm ² | Solid, min. H05(07) V-U | 0.5 mm ² |
| Solid, max. H05(07) V-U | 6 mm ² | Flexible, min. H05(07) V-K | 0.5 mm ² |
| Flexible, max. H05(07) V-K | 4 mm ² | Flexible with sleeve, max. | 2.5 mm ² |
| Flexible with sleeve, min. | 0.5 mm ² | Ferrule with plastic collar, max. | 2.5 mm ² |
| Wire cross-section, min. AWG | AWG 26 | Wire cross-section, max. AWG | AWG 12 |
| Tightening torque, min. | 0.5 Nm | Tightening torque, max. | 0.6 Nm |
| Stripping length | 6 mm | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC002780 | ETIM 7.0 | EC002780 |
| ETIM 8.0 | EC002780 | ETIM 9.0 | EC002780 |
| ECLASS 9.0 | 27-14-11-52 | ECLASS 9.1 | 27-24-22-16 |
| ECLASS 10.0 | 27-14-11-52 | ECLASS 11.0 | 27-14-11-52 |
| ECLASS 12.0 | 27-14-11-52 | ECLASS 13.0 | 27-14-11-52 |

Environmental Product Compliance

| | |
|------------|--|
| REACH SVHC | Lead 7439-92-1 4,4'-isopropylidenediphenol 80-05-7 |
| SCIP | 66e752f3-a24f-4fef-89c4-f29f52d01390 |

Approvals

Approvals



ROHS

Conform

Downloads

| | |
|---|---|
| Approval/Certificate/Document of Conformity | Declaration of Conformity |
| Engineering Data | CAD data – STEP |
| Product Change Notification | 20210330 Technical change to RSM and RSMS modules |
| Catalogues | Catalogues in PDF-format |

RSM-12 C 1CO S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

