

SAIL-M12BW-PB-3.0D**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

General ordering data

| | |
|------------|--|
| Version | Bus line, One end without connector, M12, Number of poles: 2, 3 m, Socket, angled, Shielded: Yes, LED: No, Sheath material: PUR, Halogen: No |
| Order No. | 1062300300 |
| Type | SAIL-M12BW-PB-3.0D |
| GTIN (EAN) | 40322488 12325 |
| Qty. | 1 pc(s). |

SAIL-M12BW-PB-3.0D**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

| | |
|------------|-------|
| Net weight | 216 g |
|------------|-------|

Technical specifications for cable

| | | | |
|-----------------------------------|---|--|----------------------|
| Acceleration | 5 m/s ² | Bending cycles | 2 Mio |
| Bending radius, min., moving | 12 x cable diameter | Bending radius, min., stationary | 7.5 x cable diameter |
| Cable length | 3 m | Colour coding | red, green |
| Configurable cable length | No | Core cross-section AWG | AWG 24 |
| Halogen | No | Hybrid cable | No |
| Insulation | TPE | Irradiation crosslinked | No |
| Number of poles | 2 | Outer cladding in accordance with UL AWM style | 20236 (80 °C / 30 V) |
| Outside diameter | 7.8 mm ± 0.2 mm | Resistant to welding beads | No |
| Sheath material | PUR | Sheathing colour | violet |
| Shielded | Yes | Speed | 3 m/s |
| Suitable for cable carriers | Yes | Temperature range, moving | -20...60 °C |
| Temperature range, stationary | -40...70 °C | Welding spark resistance | No |
| Wire cross section (Print/Online) | PUR 0.25 mm ² / PVC 0.34 mm ² | | |

General technical data

| | | | |
|------------------------|----------------------|------------------------------|-------------------|
| Coding | B-coded | Connection thread | M12 |
| Contact material | Ni/Au | Contact surface | Gold-plated |
| Housing main material | PUR | LED | No |
| Plugging cycles | ≥ 100 | Pollution severity | 3 |
| Protection degree | IP67 | Rated current | 4 A |
| Rated voltage | 250 V | Temperature range of housing | -25...+80 °C |
| Threaded ring material | Brass, nickel-plated | Tightening torque | M12: 0.8 - 1.2 Nm |
| Version | Socket, angled | jumpered | No |

Electrical properties

| | |
|---------------|-------|
| Rated voltage | 250 V |
|---------------|-------|

General standards

| | |
|-------------------------|---------|
| Certificate no. (cULus) | E307231 |
|-------------------------|---------|

Plug, left

| | |
|-----------|---|
| Plug left | M12, B-coded, IP67, female contact, angled 90°, Plastic, shielded |
|-----------|---|

Plug, right

| | |
|------------|--------------------|
| Plug right | free conductor end |
|------------|--------------------|

SAIL-M12BW-PB-3.0D

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC002599 | ETIM 7.0 | EC002599 |
| ETIM 8.0 | EC002599 | ETIM 9.0 | EC002599 |
| ECLASS 9.0 | 27-06-03-08 | ECLASS 9.1 | 27-06-03-08 |
| ECLASS 10.0 | 27-06-03-08 | ECLASS 11.0 | 27-06-03-08 |
| ECLASS 12.0 | 27-06-03-08 | ECLASS 13.0 | 27-06-03-08 |

Environmental Product Compliance

| | |
|------------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1 |
| SCIP | 1c533b66-fcff-4da5-b89f-fd55fbf5cb55 |

Approvals

Approvals



| | |
|-------------------------|------------|
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate no. (cULus) | E307231 |

Downloads

| | |
|------------------|--|
| Engineering Data | CAD data – STEP |
| Catalogues | Catalogues in PDF-format |
| Brochures | FL FIELDWIRING EN |


SAIL-M12BW-PB-3.0D

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Dimensioned drawing

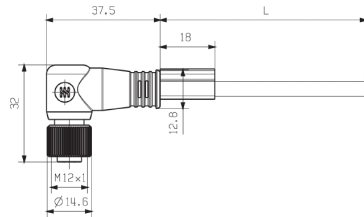


Socket

Pole scheme



Socket

Wiring diagram



The ideal tool: Screwty[®] with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F