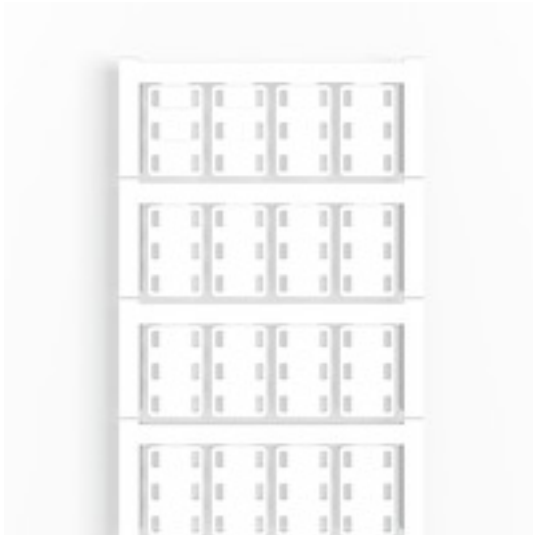


**VT SFX 14/23 MC NE WS V0****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Similar to illustration



SlimFix X are halogen-free conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. SlimFix is an acknowledged and approved marker type in traffic engineering. The SF tool allows easy installation even in case of small markers.

- Halogen-free material
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm<sup>2</sup>
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**General ordering data**

Version	SlimFix X, Conductor and cable markers, 7 - 40 mm, 23 x 14 mm, white
Order No.	<a href="#">1689490001</a>
Type	VT SFX 14/23 MC NE WS V0
GTIN (EAN)	4008190872625
Qty.	320 pc(s).
compatible printer	<a href="#">2715590000</a> <a href="#">2438520000</a> <a href="#">2438510000</a>

**VT SFX 14/23 MC NE WS V0**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Technical data**
**Dimensions and weights**

Depth	0.5 mm	Depth (inches)	0.02 inch
Height	23 mm	Height (inches)	0.906 inch
Width	14 mm	Width (inches)	0.551 inch
Net weight	0.495 g		

**Temperatures**

Operating temperature range	-50...120 °C
-----------------------------	--------------

**General data**

Colour	white	
Halogen	No	
Material	Polyamide 66	
Material colour according to resistance code	9	
Number of markers per combination	1 MultiCard = Conductor and cable markers	
Number of markers per packaging unit	Form of supply	MultiCard
Operating temperature range	-50...120 °C	
Operating temperature range, max.	120 °C	
Operating temperature range, min.	-50 °C	
Recommended industries	Transportation, Machinery	
Size of labelling field	23 x 8 mm	
Type of printing	neutral	
UL 94 flammability rating	V-0	
Version	Installation with cable ties	
Width	14 mm	

**Conductor and cable markers**

Conductor O.D.	7 - 40 mm	Conductor O.D., max.	40 mm
Conductor O.D., min.	7 mm	Conductor cross-section, max.	500 mm <sup>2</sup>
Conductor cross-section, min.	16 mm <sup>2</sup>	Cross-section for connected wire	16 - 500 mm <sup>2</sup>
Halogen	No		

**Classifications**

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ETIM 8.0	EC001530	ETIM 9.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02
ECLASS 12.0	27-28-11-02	ECLASS 13.0	27-28-11-02

**Environmental Product Compliance**

REACH SVHC	/
------------	---

**Approvals**

ROHS	Conform
------	---------

### VT SFX 14/23 MC NE WS V0

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

Engineering Data

[CAD data – STEP](#)

Catalogues

[Catalogues in PDF-format](#)

**VT SFX 14/23 MC NE WS V0**

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Drawings

