

HDC 32B SDLU 1M32G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**IP65**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Version	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Base housing, End-locking clamp, lower side, Standard, with cover, Size of cable entries: M 32
Order No.	1902650000
Type	HDC 32B SDLU 1M32G
GTIN (EAN)	4032248585656
Qty.	1 pc(s).

HDC 32B SDLU 1M32G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	126 mm	Depth (inches)	4.961 inch
Height	96 mm	Height (inches)	3.78 inch
Width	143.1 mm	Width (inches)	5.634 inch
Mounting dimension - height	67 mm	Mounting dimension - width	112 mm
Net weight	788 g		

Temperatures

Limit temperature	-40 °C ... 125 °C
-------------------	-------------------

Dimensions

Cable entry	w. thread	Height of base B1	5 mm
Height of housing B	96 mm	Hole pitch length A2	112 mm
Total length housing	94 mm	Width base C1	92.5 mm
Width housing C	82.5 mm		

General data

EMC housings	No	Housing main material	diecast aluminium
Material of locking element	Stainless steel, rust-proof	Protection class note	Protection class with secured cover: IP 65
Protection degree	IP65 (in plugged condition)	Surface finish	Powder coating
Tightening torque	2 Nm		

Version

BG	10	Cable entry	w. thread
Clamp version	End-locking clamp	Colour (RAL)	RAL 7035
Cover	with cover	Design	Standard
Design of cover	with cover	Design of housing	Base housing
Design of locking system	End-locking clamp, lower side	Internal thread	M 32
Number of cable entry on top	0	Number of cable entry sideways	1
Sealing	NBR	Size	10
Size of cable entries	M 32	Suitable for ModuPlug®	Yes
Tightening torque	2 Nm	Top part/bottom part/lid	lower part
Type	Base housing		

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ETIM 8.0	EC000437	ETIM 9.0	EC000437
ECLASS 9.0	27-44-02-02	ECLASS 9.1	27-44-02-02
ECLASS 10.0	27-44-02-02	ECLASS 11.0	27-44-02-02
ECLASS 12.0	27-44-02-02	ECLASS 13.0	27-44-02-02

Substance	Acetone
Chemical resistance	Conditionally resistant
Substance	Drilling oil
Chemical resistance	Resistant
Substance	Diesel

HDC 32B SDLU 1M32G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Chemical resistance	Resistant
Substance	Ethyl alcohol
Chemical resistance	Resistant
Substance	Transmission oil
Chemical resistance	Resistant
Substance	Hydraulic oil
Chemical resistance	Resistant
Substance	Coolant
Chemical resistance	Resistant
Substance	Petroleum benzine
Chemical resistance	Resistant
Substance	Sweat
Chemical resistance	Resistant
Substance	Premium gasoline
Chemical resistance	Conditionally resistant
Substance	Water
Chemical resistance	Resistant
Substance	UV
Chemical resistance	Unstable
Substance	Ozone
Chemical resistance	Unstable

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1 Potassium perfluorobutane sulfonate 29420-49-3
SCIP	e98b2b24-ba23-41bf-8d19-0dda3647412f
Chemical resistance	de.myview.objectmodel.impl.BlockImpl@2edf5053 de.myview.objectmodel.impl.BlockImpl@29f7494 de.myview.objectmodel.impl.BlockImpl@48bb3321 de.myview.objectmodel.impl.BlockImpl@5c67696e de.myview.objectmodel.impl.BlockImpl@8eee779 de.myview.objectmodel.impl.BlockImpl@71ac0924 de.myview.objectmodel.impl.BlockImpl@609f1e0b de.myview.objectmodel.impl.BlockImpl@754276f de.myview.objectmodel.impl.BlockImpl@78fecdd3 de.myview.objectmodel.impl.BlockImpl@690a1ec1 de.myview.objectmodel.impl.BlockImpl@71fd2aad de.myview.objectmodel.impl.BlockImpl@57b414a2 de.myview.objectmodel.impl.BlockImpl@592adb2

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E92202

Creation date July 7, 2024 7:58:27 PM CEST

Catalogue status 29.06.2024 / We reserve the right to make technical changes.

HDC 32B SDLU 1M32G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads


Engineering Data	CAD data – STEP
Product Change Notification	20220214 Technical change to HDC housings 20220214 Technische Änderung bei HDC-Gehäusen
Technical Documentation	1902650000 HDC_32B_SDLU_1M32G_STP_Blatt_1.pdf
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN

HDC 32B SDLU 1M32G

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

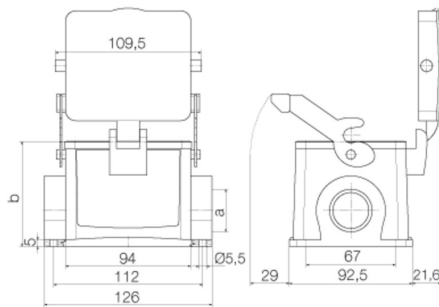

HDC 32B SDLU 1M32G

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Housing, cable entry sideways



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 32B TSLU 1M32G	Version
Order No.	1788420000	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, End-locking clamp,
GTIN (EAN)	4032248205950	lower side, Standard, Size of cable entries: M 32
Qty.	1 pc(s).	
Type	HDC 32B TSLU 1PG29G	Version
Order No.	1667120000	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, End-locking clamp,
GTIN (EAN)	4008190424329	lower side, Standard, Size of cable entries: PG 29
Qty.	1 pc(s).	

Housing, cable entry at top



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 32B TOLU 1M32G	Version
Order No.	1788450000	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged condition), Cable entry from top, Plug housing, End-locking clamp,
GTIN (EAN)	4032248205981	lower side, Standard, Size of cable entries: M 32
Qty.	1 pc(s).	

HDC 32B SDLU 1M32G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories**

Type	HDC 32B TOLU 1PG29G	Version
Order No.	1219300000	HDC enclosures, Size: 10, Protection degree: IP65 (in plugged
GTIN (EAN)	4008190164652	condition), Cable entry from top, Plug housing, End-locking clamp,
Qty.	1 pc(s).	lower side, Standard, Size of cable entries: PG 29