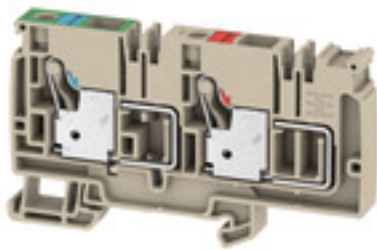


**AAP14 10 FE-LO****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

The unique modular concept can be tailored to every type of machine. The potential distribution terminal blocks AAP are successful thanks to their uniform design with two possible constructions – alternating or grouped. With the alternating design of the control voltage distribution, both potentials are located on only one terminal block.

**General ordering data**

|            |  |
|------------|--|
| Version    | Supply terminal, PUSH IN, 10 mm <sup>2</sup> , 500 V, 57 A, dark beige |
| Order No.  | <a href="#">1988240000</a>   |
| Type       | AAP14 10 FE-LO   |
| GTIN (EAN) | 4050118372953  |
| Qty.       | 20 pc(s).  |

**AAP14 10 FE-LO****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 53.5 mm    | Depth (inches) | 2.106 inch |
| Depth including DIN rail | 54 mm      | Height         | 94 mm      |
| Height (inches)          | 3.701 inch | Width          | 10 mm      |
| Width (inches)           | 0.394 inch | Net weight     | 42.804 g   |

**Temperatures**

|                                  |                |                                  |        |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature              | -25 °C...55 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C         |                                  |        |

**Material data**

|                                |            |                           |            |
|--------------------------------|------------|---------------------------|------------|
| Material                       | Wemid      | Colour                    | dark beige |
| Colour of operational elements | red / blue | UL 94 flammability rating | V-0        |

**Rating data IECEx/ATEX**

|                                |                    |                                 |                    |
|--------------------------------|--------------------|---------------------------------|--------------------|
| Certificate No. (ATEX)         | TUEV17ATEX8030U    | Certificate No. (IECEX)         | IECEXTUR17.0015U   |
| Max. voltage (ATEX)            | 352 V              | Current (ATEX)                  | 45 A               |
| Wire cross section max. (ATEX) | 10 mm <sup>2</sup> | Max. voltage (IECEX)            | 352 V              |
| Current (IECEX)                | 45 A               | Wire cross section max. (IECEX) | 10 mm <sup>2</sup> |
| Marking EN 60079-7             | Ex ec II C Gc      | Ex 2014/34/EU label             | II 2 G D           |

**System specifications**

|                               |     |                                     |       |
|-------------------------------|-----|-------------------------------------|-------|
| End cover plate required      | Yes | Number of potentials                | 2     |
| Number of levels              | 1   | Number of clamping points per level | 2     |
| Number of potentials per tier | 2   | Levels cross-connected internally   | No    |
| PE connection                 | No  | Rail                                | TS 35 |
| N-function                    | No  | PE function                         | No    |
| PEN function                  | No  |                                     |       |

**Additional technical data**

|                          |         |                     |       |
|--------------------------|---------|---------------------|-------|
| Explosion-tested version | Yes     | Installation advice | Rail  |
| Open sides               | right   | Snap-on             | No    |
| Type of fixing           | Snap-on | Type of mounting    | TS 35 |
| With snap-in pegs        | No      |                     |       |

**CSA rating data**

|                               |                 |                               |       |
|-------------------------------|-----------------|-------------------------------|-------|
| Certificate No. (CSA)         | 200039-70089609 | Current size B (CSA)          | 51 A  |
| Current size C (CSA)          | 51 A            | Current size D (CSA)          | 10 A  |
| Voltage size B (CSA)          | 300 V           | Voltage size C (CSA)          | 300 V |
| Voltage size D (CSA)          | 300 V           | Wire cross section max. (CSA) | 6 AWG |
| Wire cross section min. (CSA) | 20 AWG          |                               |       |

**Conductors for clamping (additional connection)**

Connection type, additional connection PUSH IN

**Conductors for clamping (rated connection)**

|                      |                    |
|----------------------|--------------------|
| Blade size           | 1.0 x 5.5 mm       |
| Clamping range, max. | 10 mm <sup>2</sup> |

Creation date October 2, 2024 5:37:45 PM CEST

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|   |  |         |                      |
|---|--|---------|----------------------|
| Clamping range, min.  | 0.5 mm <sup>2</sup>                    |         |                      |
| Connection cross-section, stranded, max.  | 10 mm <sup>2</sup>                     |         |                      |
| Connection cross-section, stranded, min.  | 0.5 mm <sup>2</sup>                    |         |                      |
| Connection direction  | top                                    |         |                      |
| Gauge to IEC 60947-1  | A6                                     |         |                      |
| Number of connections   | 2                                      |         |                      |
| Stripping length  | 18 mm                                  |         |                      |
| Tube length for twin wire-end ferrule   | Cross-section for conductor connection | min.    | 0.75 mm <sup>2</sup> |
|   |  | max.    | 1 mm <sup>2</sup>    |
|   | Tube length                            | nominal | 18 mm                |
|   | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
|   |  | max.    | 4 mm <sup>2</sup>    |
|   | Tube length                            | max.    | 18 mm                |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4                        |  | min.    | 12 mm                |
|   | Tube length                            | min.    | 18 mm                |
|   | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
|   |  | max.    | 4 mm <sup>2</sup>    |
|   | Tube length                            | max.    | 18 mm                |
|   |  | min.    | 12 mm                |
| Tube length for wire-end ferrule without plastic collar DIN 46228/1                     | Cross-section for conductor connection | min.    | 6 mm <sup>2</sup>    |
|   |  | max.    | 10 mm <sup>2</sup>   |
|   | Tube length                            | nominal | 18 mm                |
|   | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
|   |  | max.    | 10 mm <sup>2</sup>   |
|   |  |         |                      |
| Twin wire-end ferrules, max.  | 4 mm <sup>2</sup>                      |         |                      |
| Twin wire-end ferrules, min.  | 0.5 mm <sup>2</sup>                    |         |                      |
| Type of connection  | PUSH IN                                |         |                      |
| Wire connection cross section AWG, max.   | AWG 6                                  |         |                      |
| Wire connection cross section AWG, min.   | AWG 20                                 |         |                      |
| Wire connection cross section, finely stranded, max.                                    | 10 mm <sup>2</sup>                     |         |                      |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 10 mm <sup>2</sup>                     |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 10 mm <sup>2</sup>                     |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, max.   | 10 mm <sup>2</sup>                     |         |                      |
| Wire connection cross-section, solid core, min.   | 0.5 mm <sup>2</sup>                    |         |                      |

## General

|   |                                  |   |       |
|---|----------------------------------|---|-------|
| Installation advice                     | Rail                             | Rail                                    | TS 35 |
| Standards                               | In accordance with IEC 60947-7-2 | Wire connection cross section AWG, max. | AWG 6 |
| Wire connection cross section AWG, min. | AWG 20                           |   |       |

Creation date October 2, 2024 5:37:45 PM CEST

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rating data

|  |                    |                                 |                                  |
|--|--------------------|---------------------------------|----------------------------------|
| Rated cross-section                          | 10 mm <sup>2</sup> | Rated voltage                   | 500 V                            |
| Rated DC voltage                             | 500 V              | Rated current                   | 57 A                             |
| Current at maximum wires                     | 57 A               | Standards                       | In accordance with IEC 60947-7-2 |
| Volume resistance according to IEC 60947-7-x | 0.56 mΩ            | Rated impulse withstand voltage | 6 kV                             |
| Power loss in accordance with IEC 60947-7-x  | 1.82 W             | Pollution severity              | 3                                |
| Surge voltage category                       | III                |                                 |                                  |

## UL rating data

|  |        |  |       |
|--|--------|--|-------|
| Certificate No. (cURus)                    | E60693 | Conductor size Factory wiring max. (cURus) | 6 AWG |
| Conductor size Factory wiring min. (cURus) | 20 AWG | Conductor size Field wiring max. (cURus)   | 6 AWG |
| Conductor size Field wiring min. (cURus)   | 20 AWG | Current size B (cURus)                     | 51 A  |
| Current size C (cURus)                     | 51 A   | Current size D (cURus)                     | 10 A  |
| Voltage size B (cURus)                     | 150 V  | Voltage size C (cURus)                     | 150 V |
| Voltage size D (cURus)                     | 300 V  |  |       |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ETIM 9.0    | EC000897    |
| ECLASS 9.0  | 27-14-11-20 | ECLASS 9.1  | 27-14-11-20 |
| ECLASS 10.0 | 27-14-11-20 | ECLASS 11.0 | 27-14-11-20 |
| ECLASS 12.0 | 27-14-11-20 | ECLASS 13.0 | 27-25-01-01 |
| ECLASS 14.0 | 27-25-01-01 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| REACH SVHC             | /                           |
| RoHS Compliance Status | Compliant without exemption |

## Approvals

Approvals



|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate No. (cURus) | E60693     |

**AAP14 10 FE-LO****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Downloads**



|   |  |
|---|--|
| Approval/Certificate/Document of Conformity | <a href="#">Attestation of Conformity</a>                            |
|   | <a href="#">IECEX Certificate</a>                                    |
|   | <a href="#">ATEX Certificate</a>                                     |
|   | <a href="#">DNVGL certificate</a>                                    |
|   | <a href="#">BV certificate</a>                                       |
|   | <a href="#">CCC Ex Certificate</a>                                   |
|   | <a href="#">20-AV4BO-0271U</a>                                       |
|   | <a href="#">DNV Certificate</a>                                      |
|   | <a href="#">CE Declaration of Conformity</a>                         |
|   | <a href="#">UKCA declaration of conformity</a>                       |
| Engineering Data                            | <a href="#">Confirmation of Standards EN 45545-2_2020-10</a>         |
|   | <a href="#">CAD data – STEP</a>                                      |
| Tender specification                        | <a href="#">Klippon® Connect 1988240000 EN</a>                       |
|   | <a href="#">Klippon® Connect 1988240000 DE</a>                       |
| User Documentation                          | <a href="#">NTI AAP14</a>  |
|   | <a href="#">StorageConditionsTerminalBlocks</a>                      |
|   | <a href="#">AAP Terminal Blocks for control voltage distribution</a> |
|   | <a href="#">User Manual AXC PE</a>                                   |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                             |
| Brochures                                   |  |

## AAP14 10 FE-LO

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Drawings

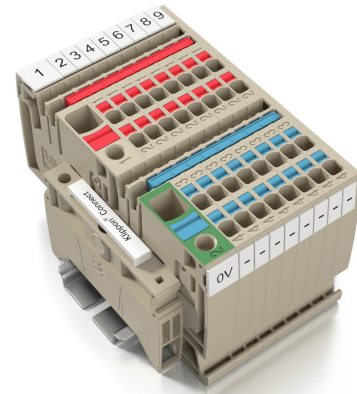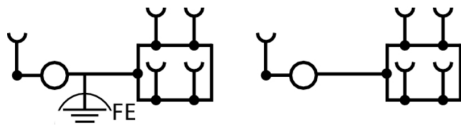

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Digital multimeters



Multimeters are capable of measuring a number of variables. Each instrument can measure voltage and resistance, as well as performing continuity and diode testing as standard.

In addition, the individual multimeters also feature extra measuring options such as current, frequency, capacitance and temperature. Digital multimeters have the advantage of a clear display which can be read easily and directly. With these instruments, mistakes arising from faulty conversion of the measuring ranges or misreading the display are a thing of the past.

## General ordering data

|            |                            |            |
|------------|----------------------------|------------|
| Type       | ZUB MULTIMETER             | Version    |
| Order No.  | <a href="#">9205270000</a> | Multimeter |
| GTIN (EAN) | 4032248723522              |            |
| Qty.       | 1 pc(s).                   |            |

10 mm<sup>2</sup> to 2.5 mm<sup>2</sup>

The unique modular concept can be tailored to every type of machine. The potential distribution terminal blocks AAP are successful thanks to their uniform design with two possible constructions – alternating or grouped. With the alternating design of the control voltage distribution, both potentials are located on only one terminal block.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | AAP14 2.5 LI-LI            | Version  |
| Order No.  | <a href="#">1988230000</a> | Modular distribution terminals, PUSH IN, 2.5 mm <sup>2</sup> , 500 V, 24 A, dark |
| GTIN (EAN) | 4050118372946              | beige  |
| Qty.       | 50 pc(s).                  |  |

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Marker holder




The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## General ordering data

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | BZT 1 ZA WS 10/5           | Version                    |
| Order No.  | <a href="#">1805520000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248              |                            |
| Qty.       | 100 pc(s).                 |                            |
| Type       | BZT 1 WS 10/5              | Version                    |
| Order No.  | <a href="#">1805490000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231              |                            |
| Qty.       | 100 pc(s).                 |                            |

## Slotted screwdriver

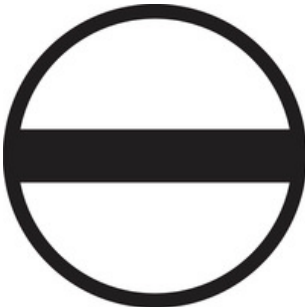

VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SDIS SLIM 0.6X3.5X100      | Version   |
| Order No.  | <a href="#">2749610000</a> | Mounting tool, Blade width (B): 3.5 mm, Blade length: 100 mm, Blade |
| GTIN (EAN) | 4050118896350              | thickness (A): 0.6 mm   |
| Qty.       | 1 pc(s).                   |   |



## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## DEK 5/8



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | DEK 5/8 MM WS              | Version  |
| Order No.  | <a href="#">2007130000</a> | Dekafix, Terminal marker, 5 x 8 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392012              |  |
| Qty.       | 500 pc(s).                 |  |

2.5 mm<sup>2</sup>

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | ZQV 2.5N/10 RD             | Version  |
| Order No.  | <a href="#">2108910000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 10, |
| GTIN (EAN) | 4050118486018              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm                |
| Qty.       | 20 pc(s).                  |  |
| Type       | ZQV 2.5N/2 RD              | Version  |
| Order No.  | <a href="#">2108470000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 2,  |
| GTIN (EAN) | 4050118448542              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm                 |
| Qty.       | 60 pc(s).                  |  |

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |   |
|------------|----------------------------|---|
| Type       | ZQV 2.5N/7 RD              | Version   |
| Order No.  | <a href="#">2108810000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 7,   |
| GTIN (EAN) | 4050118448498              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/9 BL              | Version   |
| Order No.  | <a href="#">1527870000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 9,  |
| GTIN (EAN) | 4050118448580              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/4 BL              | Version   |
| Order No.  | <a href="#">1527780000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 4,  |
| GTIN (EAN) | 4050118448634              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm                 |
| Qty.       | 60 pc(s).                  |   |
| Type       | ZQV 2.5N/8 RD              | Version   |
| Order No.  | <a href="#">2108870000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 8,   |
| GTIN (EAN) | 4050118448481              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/7 BL              | Version   |
| Order No.  | <a href="#">1527830000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 7,  |
| GTIN (EAN) | 4050118448603              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 33.4 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/50 RD             | Version   |
| Order No.  | <a href="#">2109000000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 50,  |
| GTIN (EAN) | 4050118486001              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm                  |
| Qty.       | 5 pc(s).                   |   |
| Type       | ZQV 2.5N/2 BL              | Version   |
| Order No.  | <a href="#">1527740000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 2,  |
| GTIN (EAN) | 4050118448658              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 7.9 mm                  |
| Qty.       | 60 pc(s).                  |   |
| Type       | ZQV 2.5N/4 RD              | Version   |
| Order No.  | <a href="#">2108700000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 4,   |
| GTIN (EAN) | 4050118448528              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 18.1 mm                 |
| Qty.       | 60 pc(s).                  |   |
| Type       | ZQV 2.5N/5 RD              | Version   |
| Order No.  | <a href="#">2108710000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 5,   |
| GTIN (EAN) | 4050118448511              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/6 RD              | Version   |
| Order No.  | <a href="#">2108720000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 6,   |
| GTIN (EAN) | 4050118448504              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/9 RD              | Version   |
| Order No.  | <a href="#">2108900000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 9,   |
| GTIN (EAN) | 4050118448474              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 43.6 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/20 BL             | Version   |
| Order No.  | <a href="#">1527890000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 20, |
| GTIN (EAN) | 4050118448566              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm                  |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/20 RD             | Version   |
| Order No.  | <a href="#">2108920000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 20,  |
| GTIN (EAN) | 4050118485899              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 102 mm                  |
| Qty.       | 20 pc(s).                  |   |

Creation date October 2, 2024 5:37:45 PM CEST

Catalogue status 28.09.2024 / We reserve the right to make technical changes.

10

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |   |
|------------|----------------------------|---|
| Type       | ZQV 2.5N/3 BL              | Version   |
| Order No.  | <a href="#">1527770000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 3,  |
| GTIN (EAN) | 4050118448641              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                   |
| Qty.       | 60 pc(s).                  |   |
| Type       | ZQV 2.5N/3 RD              | Version   |
| Order No.  | <a href="#">2108690000</a> | Cross-connector (terminal), Plugged, red, 24 A, Number of poles: 3,   |
| GTIN (EAN) | 4050118448535              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 13 mm                   |
| Qty.       | 60 pc(s).                  |   |
| Type       | ZQV 2.5N/10 BL             | Version   |
| Order No.  | <a href="#">1527880000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 10, |
| GTIN (EAN) | 4050118448573              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 48.7 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/50 BL             | Version   |
| Order No.  | <a href="#">1527920000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 50, |
| GTIN (EAN) | 4050118448559              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 255 mm                  |
| Qty.       | 5 pc(s).                   |   |
| Type       | ZQV 2.5N/6 BL              | Version   |
| Order No.  | <a href="#">1527820000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 6,  |
| GTIN (EAN) | 4050118448610              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 28.3 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/8 BL              | Version   |
| Order No.  | <a href="#">1527840000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 8,  |
| GTIN (EAN) | 4050118448597              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 38.5 mm                 |
| Qty.       | 20 pc(s).                  |   |
| Type       | ZQV 2.5N/5 BL              | Version   |
| Order No.  | <a href="#">1527790000</a> | Cross-connector (terminal), Plugged, blue, 24 A, Number of poles: 5,  |
| GTIN (EAN) | 4050118448627              | Pitch in mm (P): 5.10, Insulated: Yes, Width: 23.2 mm                 |
| Qty.       | 20 pc(s).                  |   |

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.


- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/8 MC NE WS           | Version   |
| Order No.  | <a href="#">1856740000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400850              | Weidmueller, white  |
| Qty.       | 800 pc(s).                 |   |

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text.

WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | WS 10/8 PLUS MC NE WS      | Version  |
| Order No.  | <a href="#">1905950000</a> | WS, Terminal marker, 10 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528103              | white  |
| Qty.       | 420 pc(s).                 |  |

**AAP14 10 FE-LO****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Custom printing**

The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**General ordering data**

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/8 MC SDR             | Version   |
| Order No.  | <a href="#">1856750000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400867              | Weidmueller, To customer specification                    |
| Qty.       | 160 pc(s).                 |   |
| Type       | DEK 5/8 PLUS MC SDR        | Version   |
| Order No.  | <a href="#">1046370000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248782079              | Weidmueller, To customer specification                    |
| Qty.       | 160 pc(s).                 |   |

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## WS 8/10



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | WS-A 8/10 MM WS            | Version  |
| Order No.  | <a href="#">2619890000</a> | WS, Terminal marker, 8 x 10 mm, Weidmueller, white |
| GTIN (EAN) | 4050118626193              |  |
| Qty.       | 350 pc(s).                 |  |

## A-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |                       |
|------------|----------------------------|-----------------------|
| Type       | AEB 35 SC/1                | Version               |
| Order No.  | <a href="#">1991920000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118376722              |                       |
| Qty.       | 50 pc(s).                  |                       |
| Type       | AEB 35 SCL/1 V0 BK         | Version               |
| Order No.  | <a href="#">2661300000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118702187              |                       |
| Qty.       | 20 pc(s).                  |                       |

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                       |
|------------|----------------------------|-----------------------|
| Type       | AEB 35 SC/1 BK             | Version               |
| Order No.  | <a href="#">2475310000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118487114              |                       |
| Qty.       | 50 pc(s).                  |                       |
| Type       | AEB 35 SCL/1 VO            | Version               |
| Order No.  | <a href="#">2661280000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118702163              |                       |
| Qty.       | 20 pc(s).                  |                       |
| Type       | AEB 35 SCL/1 VO GY         | Version               |
| Order No.  | <a href="#">2661290000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118702170              |                       |
| Qty.       | 20 pc(s).                  |                       |

## Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | WS 10/8 PLUS MC SDR        | Version  |
| Order No.  | <a href="#">1906030000</a> | WS, Terminal marker, 10 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528196              | To customer specification  |
| Qty.       | 84 pc(s).                  |  |

## AAP14 10 FE-LO

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## A-Series



Uniform inspection and test taps, consistent cross-connections, efficient markers, and timesaving PUSH IN connection technology make the A-Series particularly future-proof. The innovative design with clearly delineated functional areas and coloured pushers ensures maximum connection and maintenance safety.

## General ordering data

|            |                            |                     |
|------------|----------------------------|---------------------|
| Type       | AEP AP14                   | Version             |
| Order No.  | <a href="#">1988340000</a> | A-series, End plate |
| GTIN (EAN) | 4050118373103              |                     |
| Qty.       | 20 pc(s).                  |                     |

## A-Series



Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

## General ordering data

|            |                            |                                     |
|------------|----------------------------|-------------------------------------|
| Type       | AAM 10 YE FLASH            | Version                             |
| Order No.  | <a href="#">2635580000</a> | Terminal marker, 14 x 10 mm, yellow |
| GTIN (EAN) | 4050118674521              |                                     |
| Qty.       | 40 pc(s).                  |                                     |



**AAP14 10 FE-LO****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Plus**

The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**General ordering data**

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/5 PLUS MC NE WS      | Version   |
| Order No.  | <a href="#">1854490000</a> | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4032248393596              | Weidmueller, white  |
| Qty.       | 1,000 pc(s).               |   |