

**RFF 605 54/230V GY****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Ideal for indoor use in tight spaces. Optimised air flow and temperature distribution, protection according to IP33 or IP54 and high UV resistance.

**General ordering data**

Version	Filter fan, IP54, grey
Order No.	<a href="#">2557730000</a>
Type	RFF 605 54/230V GY
GTIN (EAN)	4050118568370
Qty.	1 pc(s).

## RFF 605 54/230V GY

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	106 mm	Depth (inches)	4.173 inch
Height	436 mm	Height (inches)	17.165 inch
Width	436 mm	Width (inches)	17.165 inch
Net weight	3,351 g		

## Temperatures

Operating temperature range	-15...55 °C
-----------------------------	-------------

## General data

Colour	grey		
Current consumption	Mains frequency	50 Hz	
	Current	0.8 A	
	Mains frequency	60 Hz	
	Current	0.8 A	
EMC version	No		
Fan type	Roof fan		
Filter class	G 4		
Fuse	6 A		
Height of installation cut-outs	291 mm		
MTBF	50,000 h		
Mounting depth	34 mm		
Mounting height	72 mm		
Noise emission	67 dB(A)		
Operating temperature range	-15...55 °C		
Power	Mains frequency	50 Hz	
	nominal	112 W	
	Mains frequency	60 Hz	
	nominal	116 W	
Protection class (UL)	Type 12		
Rated voltage	230 V AC $\pm$ 10%		
Type of connection	Terminal strip		
Type of mounting	Snap-on		
Volume flow with exhaust filter	Mains frequency	50 Hz	
	Volume flow	242 m³/h	
	Exhaust filter	IP54	
	Mains frequency	60 Hz	
	Volume flow	242 m³/h	
Volume flow, free-blowing	Exhaust filter	IP54	
	Mains frequency	50 Hz	
	Volume flow	350 m³/h	
	Mains frequency	60 Hz	
Volume flow, free-blowing at 50 Hz	Volume flow	350 m³/h	
	Volume flow	350 m³/h	
Width of installation cut-outs	291 mm		
With filter	Yes		

## RFF 605 54/230V GY

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Classifications

ETIM 6.0	EC000320	ETIM 7.0	EC000320
ETIM 8.0	EC000320	ETIM 9.0	EC000320
ECLASS 9.1	27-18-07-16	ECLASS 10.0	27-18-07-16
ECLASS 11.0	27-18-07-16	ECLASS 12.0	27-18-07-16
ECLASS 13.0	27-18-07-16		

## Environmental Product Compliance

REACH SVHC

/

## Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E252704

## Downloads

Approval/Certificate/Document of Conformity	<a href="#">EU Declaration of Conformity</a>
User Documentation	<a href="#">Installation- and operating instructions</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>


## RFF 605 54/230V GY

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

# Drawings

## Graph

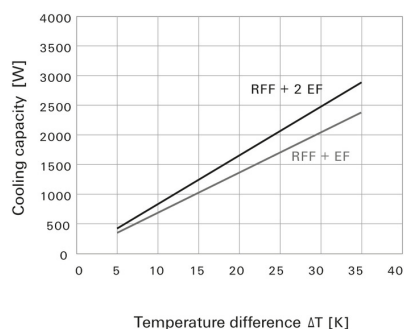

## Graph

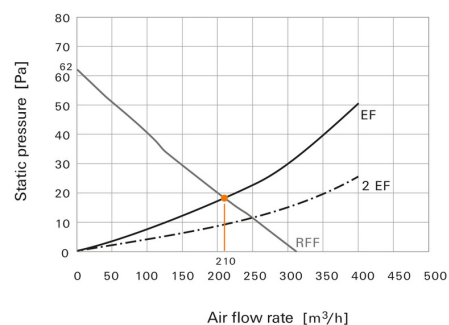

**RFF 605 54/230V GY****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Roof-mounted exhaust filter**

The filter fans combine a safe and profitable cabinet cooling due to their low energy consumption by maximum air flow. The fluted filter mat of the IP 55 version extends the service life by up to 300% in comparison to conventional filter mats.

**General ordering data**

Type	RFF-FIMT 605X 54	Version
Order No.	<a href="#">2557750000</a>	Filter mat, IP54, white
GTIN (EAN)	4050118568394	
Qty.	20 pc(s).	