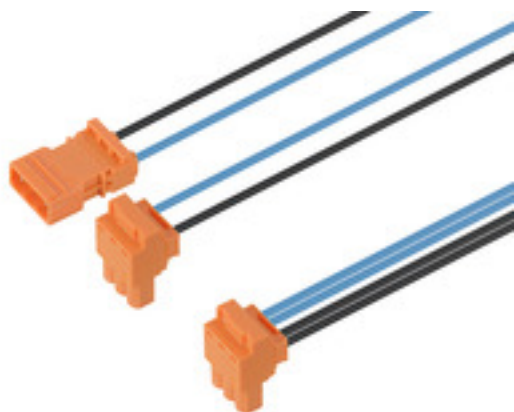


CH-SMR-00.33-YCC90**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Base counter, gateway, control box and overvoltage protection device are connected with pre-assembled cable sets as point-to-point or Y-assembly. Weidmüller offers the right connection solutions for this, conforming to FNN and DIN-VDE 0603 standards. Pre-assembled power cables with 6kV overvoltage protection round up the portfolio.

General ordering data

Version	Smart Metering Cable Assemblies, 6 kV, IP30, in plugged and mounted condition, 300 V, Li9YH 1 x 0,75,
Order No.	2924960033
Type	CH-SMR-00.33-YCC90
GTIN (EAN)	4099986795617
Qty.	10 pc(s).

CH-SMR-00.33-YCC90**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight 22.48 g

Technical specifications for cable

Bending radius, min., moving	15 x cable diameter	Bending radius, min., stationary	8 x cable diameter
Cable Material	Polyolefine	Core cross-section	0.75 mm ²
Halogen	No	Insulation	PP
Number of poles	2	Number of wires	2
Outside diameter	2.35 mm ± 0.15 mm	Resistance to oils	No
Sheathing colour	black / blue	Shielded	No
Temperature range, moving	-25...90 °C	Temperature range, stationary	-30...90 °C

General technical data

Pollution severity	3	Protection degree	IP30, in plugged and mounted condition
Rated current	9 A	Rated voltage	300 V

General Technical Data

Number of poles	2	Protection degree	IP30, in plugged and mounted condition
Rated current	9 A	Rated impulse withstand voltage	6 kV
Rated voltage	300 V		

Technical Specifications Connector

Connector	Connector description	Connector 1
	Cable entry	straight
	Housing main material	PA
	Number of poles	2
	Type	Male
	Individual components connector	
	Connector description	Connector 2
	Cable entry	angled
	Housing main material	PA
	Number of poles	2
	Type	Female
	Individual components connector	
	Connector description	Connector 4
	Cable entry	angled
	Housing main material	PA
	Number of poles	2
	Type	Female
	Individual components connector	

CH-SMR-00.33-YCC90**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Technical specifications for cable**

Bending radius, min., moving	15 x cable diameter	Bending radius, min., stationary	8 x cable diameter
Cable Material	Polyolefine	Cable length, string 1	0.33 m
Cable length, string 2	0.2 m	Core cross-section	0.75 mm ²
Halogen	No	Insulation	PP
Line type	Li9YH 1 x 0,75	Number of wires	2
Outside diameter	2.35 mm ± 0.15 mm	Resistance to oils	No
Sheathing colour	black / blue	Shielded	No
Temperature range, moving	-25...90 °C	Temperature range, moving, max.	90 °C
Temperature range, moving, min.	-25 °C	Temperature range, stationary	-30...90 °C
Temperature range, stationary, max.	90 °C	Temperature range, stationary, min.	-30 °C

Classifications

ETIM 6.0	EC001576	ETIM 7.0	EC001576
ETIM 8.0	EC001576	ETIM 9.0	EC001576
ECLASS 9.0	27-06-04-02	ECLASS 9.1	27-06-91-90
ECLASS 10.0	27-06-04-02	ECLASS 11.0	27-06-04-02
ECLASS 12.0	27-06-04-02	ECLASS 13.0	27-06-04-02

Environmental Product Compliance

REACH SVHC /

Important note

IPC conformity	Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.
Notes	unenclosed connector, without breaking capacity (COC), acc. DIN EN 61984 (VDE 0627)

Approvals

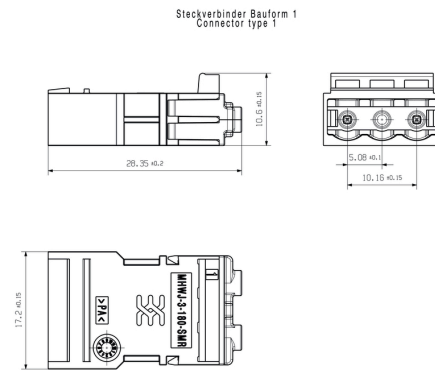
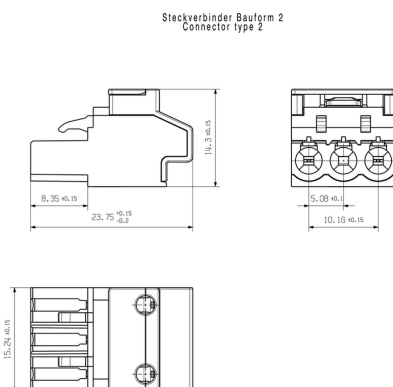
ROHS Conform

DownloadsCatalogues [Catalogues in PDF-format](#)

CH-SMR-00.33-YCC90

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings**Dimensional drawing****Dimensional drawing****Dimensional drawing**