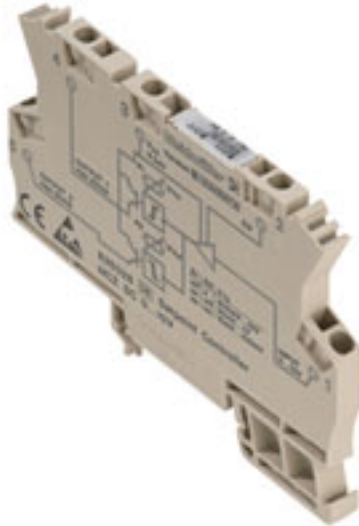


**MCZ SC 0-20MA****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image****MCZ: The smallest solution**

- The smallest analogue signal converter in terminal block format on the market
- Space-saving conversion of analogue signals in the control cabinet thanks to the slim, 6 mm wide module width
- Simple wiring with plug-in cross-connectors

**General ordering data**

Version	Limit value monitoring
Order No.	<a href="#">8227350000</a>
Type	MCZ SC 0-20MA
GTIN (EAN)	4008190193799
Qty.	10 pc(s).

## MCZ SC 0-20MA

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	63.2 mm	Depth (inches)	2.488 inch
Width	6 mm	Width (inches)	0.236 inch
Length	91 mm	Length (inches)	3.583 inch
Net weight	28 g		

## Temperatures

Storage temperature	-25 °C...60 °C	Operating temperature	-20 °C...60 °C
Humidity at operating temperature	0...95 % (no condensation)		

## Probability of failure

SIL in compliance with IEC 61508	None	MTTF	681 a
----------------------------------	------	------	-------

## Input

Input current	0.5...20 mA	Input resistance, current	50 Ω
Voltage drop	1 V		

## Output

Cut-off frequency (-3 dB)	100 Hz	Number of outputs	2
---------------------------	--------	-------------------	---

## General data

Configuration	Potentiometer	Current consumption	15 mA
Galvanic isolation	Without isolation, between input / output / supply	Protection degree	IP20
Rail		Step response time	<250 µs (switching threshold at 90% of max. input signal; $R_i \leq 1$ kΩ)
	TS 35		
Temperature coefficient	± 250 ppm/K, 350 ppm/K	Voltage supply	24 V DC ± 20 %

## Insulation coordination

EMC standards	EN 55011, EN 61000-6	Galvanic isolation	Without isolation, between input / output / supply
---------------	----------------------	--------------------	--

## Connection data

Type of connection	TOP connection, Screw connection	Clamping range, rated connection	1.5 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping range, max.	1.5 mm <sup>2</sup>

## Classifications

ETIM 6.0	EC002654	ETIM 7.0	EC002654
ETIM 8.0	EC002654	ETIM 9.0	EC002654
ECLASS 9.0	27-21-01-22	ECLASS 9.1	27-21-01-22
ECLASS 10.0	27-21-01-22	ECLASS 11.0	27-21-01-22
ECLASS 12.0	27-21-01-22	ECLASS 13.0	27-21-01-22

## MCZ SC 0-20MA

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Tender specification sheets

## Long specification

**Trip amplifier for monitoring a 0...20 mA standard signal with two switching outputs**  
**Trip amplifier in 6 mm width for analogue 0...20 mA standard signals with two PNP-transistor switch outputs for monitoring an upper and lower threshold (adjustable via potentiometer).**

**Dimensions: L/W/H**  
**91/ 6/ 63.2 mm**  
**Tension-clamp connection / Nominal cross-section 1.5 mm<sup>2</sup>**  
**Protection degree: IP 20**

**Input**  
**0.5...20 mA**  
**Output**  
**Double switching output PNP/ 50 mA per channel**

**Adjustable via potentiometer**  
**Switching hysteresis 1 % of input**  
**Step response time < 250 us (10...90 %)**  
**Temperature coefficient < 250 ppm K**  
**Auxiliary power 24 V DC +/- 20 %**  
**Ambient temperature range 0°C...+50 °C**  
**Approvals cURus, CSA**

**Type M-**  
**CZ SC 0-20MA**

## Short specification

**Trip amplifier for monitoring a 0...20 mA standard signal with two switching outputs**  
**Trip amplifier in 6 mm width for analogue 0...20 mA standard signals with two PNP-transistor switch outputs for monitoring an upper and lower threshold (adjustable via potentiometer).**

## Environmental Product Compliance

REACH SVHC

Lead 7439-92-1

SCIP

35d83707-6a3b-45b5-b9f8-6ba8184c863e

**MCZ SC 0-20MA****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Approvals**

Approvals



ROHS Conform

UL File Number Search UL Website

Certificate No. (cURus) E141197

**Downloads**

Approval/Certificate/Document of Conformity

[Application notes – Declaration of Conformity](#)

Engineering Data

[CAD data – STEP](#)

User Documentation

[Instruction sheet](#)

Catalogues

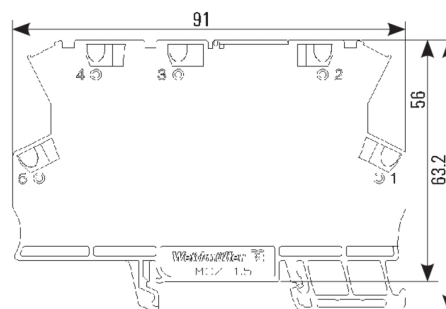
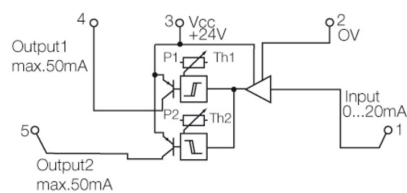
[Catalogues in PDF-format](#)

Brochures

**MCZ SC 0-20mA**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings****Connection diagram**

## MCZ SC 0-20MA

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

4 mm<sup>2</sup>

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

Type	ZQV 4N/4 GE	Version
Order No.	<a href="#">1762620000</a>	W-Series, Cross-connector, 32 A
GTIN (EAN)	4032248169771	
Qty.	60 pc(s).	
Type	ZQV 4N/3 GE	Version
Order No.	<a href="#">1762630000</a>	W-Series, Cross-connector, 32 A
GTIN (EAN)	4032248169788	
Qty.	60 pc(s).	
Type	ZQV 4N/10 GE	Version
Order No.	<a href="#">1758260000</a>	W-Series, Cross-connector, 32 A
GTIN (EAN)	4032248169764	
Qty.	20 pc(s).	
Type	ZQV 4N/2 GE	Version
Order No.	<a href="#">1758250000</a>	W-Series, Cross-connector, 32 A
GTIN (EAN)	4032248169795	
Qty.	60 pc(s).	

## AP MCZ 1.5 - End plate



Open miniature housing in modular terminal format with five tension clamp connections. A transparent hinged top plate can be used for labelling and provides access to potentiometer and status displays. Plug-in cross-connectors can be used to interconnect the three top connections. A cover plate for closing off the housing is also available.

## General ordering data

Type	AP MCZ1.5 1674	Version
Order No.	<a href="#">8389030000</a>	Small housing, OMNIMATE Housing - TERMINALBOX grey-beige, End
GTIN (EAN)	4008190386849	plate, Width: 1.5 mm
Qty.	50 pc(s).	

## MCZ SC 0-20MA

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## SAK-Series

SAK  
Series

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

Type	EW 35	Version
Order No.	<a href="#">0383560000</a>	End bracket, Wemid, beige, Rail: TS 35, when screwed in
GTIN (EAN)	4008190181314	
Qty.	50 pc(s).	

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

Type	WS 10/6 MC NE WS	Version
Order No.	<a href="#">1828450000</a>	WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller,
GTIN (EAN)	4032248350513	Allen-Bradley, white
Qty.	600 pc(s).	